

The logo for ENVI, featuring the letters 'ENVI' in a bold, black, sans-serif font. The letter 'V' is stylized with a red diagonal line through it. The background of the entire image is a collage of technical drawings of various electrical components, including terminal lugs, busbars, and mounting brackets, arranged in a grid-like pattern. A large, diagonal red and black graphic element cuts across the right side of the image.

# ENVI

**Add:** No. 232, Wei12 Road, Development Zone, Yueqing City, 325603, Zhejiang Province, China

**WHATSAPP/WECHAT:** 86-18875809966

**Website:** [www.enviele.com](http://www.enviele.com)

**TEL:** 0086-577-61757057 **Fax:** 0086-577-61757057

**EMAIL:** [sale01@envielectrical.com](mailto:sale01@envielectrical.com)





# CABLE CONNECTORS

## COMPANY INTRODUCTION

Zhejiang Enwei Electrical Equipment Co., Ltd. was established in 2011, with its headquarters located in Yueqing City, Zhejiang Province. We are a company specialized in the production of products such as cable connectors, wiring terminals, cable accessories, and power line clips.

## COMPANY MISSION



Our mission is to safeguard the electrical safety of our customers and provide them with reliable electrical connection solutions.

## DEVELOPMENT MILESTONES

Since the establishment of the Weierde brand in 2004, we have continuously strived for development. We officially registered as a company in 2011. In 2015, we achieved nationwide sales network construction. Furthermore, we obtained the qualification as a supplier to the State Grid Corporation of China in 2018 and acquired the qualification as a supplier to the Southern Power Grid of China in 2019.

## FUTURE PROSPECTS

We will continue to focus on improving product quality, researching metal processing technology, and actively promoting green and recyclable development. We hope that through our efforts, we can better safeguard human electrical safety and contribute to the sustainable development of society.

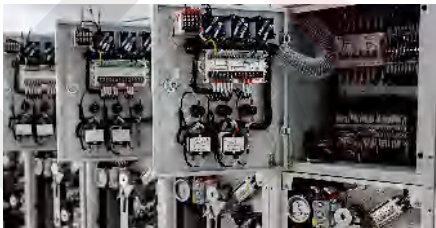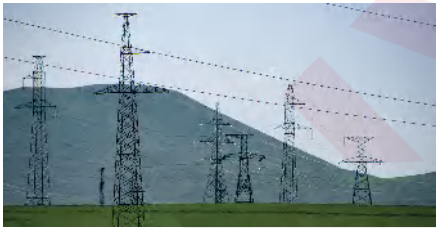



Zhejiang Enwei Electric Co., Ltd. is located in the Yueqing Economic Development Zone, Zhejiang Province, China. It is a professional manufacturer of electrical fittings with nearly 30 years of experience in metal processing. Since its establishment, the company has focused on providing high-quality cable accessories, line fittings, and various other electrical products for the power transmission and distribution industry, which are widely used in various power engineering projects.

As a leading enterprise in the industry, Enwei Electric adheres to high manufacturing standards and strict quality control. With rich experience and flexible production capabilities, we are able to quickly respond to market changes and provide customized solutions to our customers. The company is equipped with advanced production facilities and technologies to ensure that each product meets or even exceeds customer expectations.

At Enwei Electric, we understand that our customers' success is our success. We not only provide high-quality products but also emphasize close cooperation with our clients, listening to their needs and offering comprehensive technical support and after-sales services. Through continuous investment in research and development and process innovation, we are constantly improving the performance, durability, and ease of installation of our products, helping clients achieve more efficient and reliable solutions in their projects.

With excellent product quality and superior customer service, Zhejiang Enwei Electric Co., Ltd. has gained wide trust from both domestic and international customers. We will continue to uphold the principle of "Quality First, Customer Supreme," striving for progress and contributing to the development of the global power industry.

## DT Series Copper Terminal



Material: Copper


| Catalog No. | Dimensions(mm) |      |      |    |      |     |      |      |
|-------------|----------------|------|------|----|------|-----|------|------|
|             | $\phi$         | D    | d    | L1 | L2   | L   | W    | S    |
| DT-A-10     | 8.5            | 9    | 5.5  | 29 | 21   | 63  | 16   | 2.2  |
| DT-A-16     | 8.5            | 10   | 6.5  | 30 | 21.5 | 65  | 15.7 | 2.5  |
| DT-A-25     | 8.5            | 11   | 7.5  | 35 | 25   | 70  | 18   | 2.5  |
| DT-A-35     | 10.5           | 12   | 8.3  | 38 | 27   | 78  | 20   | 3.1  |
| DT-A-50     | 10.5           | 14   | 9.7  | 42 | 30   | 86  | 23   | 3.8  |
| DT-A-70     | 12.5           | 16   | 11.1 | 46 | 32   | 93  | 26   | 4    |
| DT-A-95     | 12.5           | 18   | 13.6 | 52 | 35   | 105 | 28.5 | 4    |
| DT-A-120    | 14.8           | 20   | 15.5 | 55 | 36.5 | 112 | 30   | 4.5  |
| DT-A-150    | 14.5           | 22   | 16.5 | 57 | 39   | 118 | 34   | 5.5  |
| DT-A-185    | 16.5           | 24.5 | 18.2 | 59 | 44   | 123 | 37   | 6    |
| DT-A-240    | 16.5           | 27   | 21   | 65 | 47   | 134 | 40   | 6.5  |
| DT-A-300    | 21             | 29   | 23   | 67 | 60   | 160 | 45   | 7.8  |
| DT-A-400    | 22             | 34   | 25.6 | 77 | 65   | 165 | 50   | 9    |
| DT-A-500    | 22             | 38.2 | 28.7 | 77 | 73.5 | 186 | 55   | 9.4  |
| DT-A-630    | 22             | 45   | 34.5 | 86 | 78   | 215 | 59   | 11.5 |

| Catalog No. | Dimensions(mm) |      |      |      |      |     |      |     |
|-------------|----------------|------|------|------|------|-----|------|-----|
|             | $\phi$         | D    | d    | L1   | L2   | L   | B    | A   |
| DT-B-16     | 8.8            | 9    | 6.2  | 31   | 23   | 62  | 15   | 2   |
| DT-B-25     | 8.5            | 10   | 7.5  | 32   | 22   | 67  | 16   | 2.3 |
| DT-B-35     | 10.7           | 10.7 | 8.3  | 32   | 24   | 71  | 18   | 2.3 |
| DT-B-50     | 10.5           | 12.7 | 10   | 34.5 | 27   | 79  | 20   | 2.6 |
| DT-B-70     | 12.5           | 14.7 | 11.8 | 36.5 | 29   | 84  | 23   | 2.9 |
| DT-B-95     | 12.5           | 17   | 13.6 | 42   | 35   | 93  | 26   | 3.5 |
| DT-B-120    | 14.8           | 18.7 | 15.5 | 46   | 34   | 96  | 28   | 3.5 |
| DT-B-150    | 16.5           | 20.7 | 16.7 | 46   | 36   | 104 | 30   | 4.2 |
| DT-B-185    | 16.5           | 22.7 | 18.5 | 50   | 40   | 113 | 32.5 | 4.6 |
| DT-B-240    | 16.7           | 25.7 | 21.2 | 52   | 44   | 121 | 37   | 5.5 |
| DT-B-300    | 20.1           | 30   | 23.5 | 64   | 46.5 | 138 | 42   | 6.1 |

## DT Series Copper Terminal

| Catalog No. | Dimensions(mm) |      |      |    |      |      |      |     |
|-------------|----------------|------|------|----|------|------|------|-----|
|             | $\phi$         | D    | d    | L1 | L2   | L    | B    | A   |
| DT-C-10-8   | 8.5            | 8    | 6.1  | 27 | 19   | 54.5 | 13   | 1.8 |
| DT-C-10-9   | 8.5            | 9    | 6.1  | 27 | 20   | 56   | 13   | 1.9 |
| DT-C-16     | 8.5            | 9    | 6.7  | 28 | 21   | 58.5 | 15   | 1.8 |
| DT-C-25     | 8.5            | 10   | 7.3  | 31 | 21   | 64   | 16   | 1.9 |
| DT-C-35     | 10.5           | 10.7 | 8.4  | 32 | 23   | 66.5 | 17   | 2.4 |
| DT-C-50     | 10.5           | 12.7 | 10   | 35 | 23   | 73   | 18   | 2.4 |
| DT-C-70     | 12.5           | 14.7 | 11.5 | 41 | 25   | 78   | 20   | 2.5 |
| DT-C-95     | 12.5           | 16.7 | 13.3 | 43 | 26   | 85   | 23   | 3.1 |
| DT-C-120    | 14.5           | 18.7 | 15.7 | 46 | 30   | 96   | 28   | 3.2 |
| DT-C-150    | 16.5           | 20.7 | 17   | 47 | 35   | 98   | 30   | 3.3 |
| DT-C-185    | 16.5           | 22.7 | 18.5 | 50 | 35.5 | 109  | 33.5 | 3.1 |
| DT-C-240    | 18.5           | 25.7 | 21.5 | 52 | 39   | 115  | 36   | 4   |
| DT-C-300    | 20.5           | 30   | 23.7 | 60 | 45   | 132  | 42   | 5.4 |
| DT-C-400    | 22             | 32   | 25.8 | 75 | 58   | 164  | 50   | 6   |
| DT-C-500    | 22             | 35   | 29   | 83 | 70   | 184  | 55   | 7   |

## DTL Series Copper And Aluminum Terminal

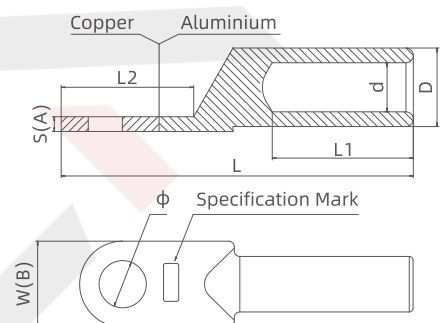

Material: Copper, aluminum

| Catalog No. | Dimensions(mm) |    |      |      |    |     |      |      |
|-------------|----------------|----|------|------|----|-----|------|------|
|             | $\phi$         | D  | d    | L1   | L2 | L   | w    | S    |
| DTL-A-10    | 8.5            | 10 | 5.5  | 33   | 22 | 65  | 16   | 2.2  |
| DTL-A-16    | 8.5            | 11 | 6.5  | 35   | 24 | 70  | 16   | 2.3  |
| DTL-A-25    | 8.5            | 12 | 7.5  | 40   | 26 | 75  | 18   | 2.5  |
| DTL-A-35    | 10.5           | 14 | 8.5  | 42   | 29 | 85  | 20   | 3.2  |
| DTL-A-50    | 10.5           | 16 | 10   | 45   | 32 | 90  | 23   | 3.6  |
| DTL-A-70    | 12.5           | 18 | 11.5 | 50   | 35 | 100 | 26   | 4    |
| DTL-A-95    | 12.5           | 20 | 13.5 | 55   | 38 | 112 | 28.5 | 4.3  |
| DTL-A-120   | 14.5           | 23 | 16   | 54   | 41 | 119 | 30   | 4.5  |
| DTL-A-150   | 14.5           | 25 | 16.5 | 58   | 43 | 125 | 34   | 5.3  |
| DTL-A-185   | 16.5           | 27 | 18.5 | 64   | 46 | 133 | 37   | 5.7  |
| DTL-A-240   | 16.5           | 30 | 21   | 65   | 49 | 140 | 40   | 6.5  |
| DTL-A-300   | 20.8           | 34 | 22.3 | 78.5 | 60 | 163 | 45   | 8    |
| DTL-A-400   | 22             | 38 | 27   | 86   | 60 | 180 | 50   | 8.5  |
| DTL-A-630   | 22.5           | 50 | 34.8 | 95   | 77 | 213 | 59   | 10.5 |




DTL Series Bimetal Terminal

| Catalog No. | Dimensions(mm) |      |      |      |      |     |      |     |
|-------------|----------------|------|------|------|------|-----|------|-----|
|             | φ              | D    | d    | L1   | L2   | L   | B    | A   |
| DTL-B-16    | 8.8            | 10   | 6.5  | 28   | 22   | 65  | 14   | 2.3 |
| DTL-B-25    | 8.8            | 11   | 7.5  | 31.5 | 24.5 | 69  | 16   | 2.5 |
| DTL-B-35    | 10.8           | 12   | 8.5  | 32   | 26   | 71  | 18   | 2.8 |
| DTL-B-50    | 10.8           | 14   | 10   | 41   | 28.5 | 81  | 20   | 2.9 |
| DTL-B-70    | 12.2           | 16   | 11.5 | 41   | 31   | 88  | 23   | 3.2 |
| DTL-B-95    | 12.2           | 18   | 13.5 | 42   | 32.5 | 94  | 26   | 3.6 |
| DTL-B-120   | 14.8           | 20   | 15.5 | 51   | 37   | 105 | 28   | 3.8 |
| DTL-B-150   | 14.8           | 22.7 | 17.8 | 50   | 40   | 112 | 32.5 | 4.2 |
| DTL-B-185   | 16.8           | 24   | 18.7 | 58   | 44   | 123 | 36.8 | 4.4 |
| DTL-B-240   | 16.8           | 27   | 20.7 | 59   | 45   | 135 | 40   | 4.7 |

| Catalog No. | Dimensions(mm) |    |      |      |      |     |      |     |
|-------------|----------------|----|------|------|------|-----|------|-----|
|             | φ              | D  | d    | L1   | L2   | L   | B    | A   |
| DTL-C-10    | 8.5            | 9  | 5.5  | 30   | 21   | 64  | 13   | 1.7 |
| DTL-C-16    | 8.5            | 10 | 6.3  | 32   | 22   | 65  | 14   | 1.9 |
| DTL-C-25    | 8.5            | 11 | 7.1  | 31.5 | 21   | 68  | 16   | 1.9 |
| DTL-C-35    | 10.5           | 12 | 8.5  | 36.5 | 25   | 74  | 17.5 | 2.1 |
| DTL-C-50    | 10.5           | 14 | 10   | 40   | 27   | 82  | 18.5 | 2.5 |
| DTL-C-70    | 12.5           | 15 | 11.3 | 40   | 26.5 | 88  | 22   | 2.6 |
| DTL-C-95    | 12.8           | 18 | 13.5 | 47   | 31   | 94  | 24.5 | 3.1 |
| DTL-C-120   | 14.8           | 20 | 15.3 | 53   | 34.5 | 105 | 27   | 3.2 |
| DTL-C-150   | 14.8           | 22 | 17   | 55   | 37   | 110 | 29   | 3.7 |
| DTL-C-185   | 17             | 24 | 18.7 | 54   | 41   | 118 | 31   | 4.2 |
| DTL-C-240   | 17             | 27 | 21   | 57.5 | 41   | 125 | 34.5 | 4.2 |
| DTL-C-300   | 17             | 30 | 23.5 | 67   | 50   | 142 | 40   | 5.8 |
| DTL-C-400   | 22             | 38 | 27   | 72   | 61   | 170 | 50   | 7.5 |
| DTL-C-500   | 22             | 42 | 29   | 78   | 66   | 175 | 55   | 8.3 |

DL Series Aluminum Terminal

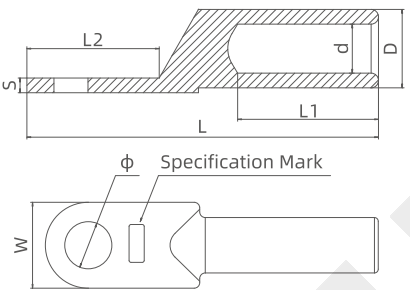


Material: Aluminum

| Catalog No. | Dimensions(mm) |      |      |    |      |     |    |     |
|-------------|----------------|------|------|----|------|-----|----|-----|
|             | φ              | D    | d    | L1 | L2   | L   | w  | S   |
| DL-A-10     | 8.5            | 10   | 5.5  | 31 | 22   | 65  | 16 | 2.3 |
| DL-A-16     | 8.5            | 11   | 6.5  | 33 | 24   | 70  | 16 | 2.4 |
| DL-A-25     | 8.3            | 12   | 7.5  | 35 | 26   | 74  | 18 | 2.8 |
| DL-A-35     | 10.5           | 14   | 8.5  | 44 | 25.5 | 83  | 22 | 3.4 |
| DL-A-50     | 10.5           | 16   | 9.5  | 42 | 29   | 90  | 23 | 3.8 |
| DL-A-70     | 12.5           | 18   | 11.5 | 50 | 30   | 99  | 26 | 4   |
| DL-A-95     | 12.5           | 20.5 | 13.5 | 55 | 35   | 110 | 28 | 4.7 |
| DL-A-120    | 14.5           | 23   | 15.5 | 52 | 36   | 120 | 30 | 5   |
| DL-A-150    | 14.5           | 25   | 16.5 | 62 | 43.5 | 126 | 34 | 5.8 |
| DL-A-185    | 16.5           | 27   | 18.5 | 63 | 43.5 | 133 | 37 | 6.8 |
| DL-A-240    | 16.5           | 30   | 21   | 66 | 49   | 140 | 40 | 6.6 |
| DL-A-300    | 21             | 34   | 23   | 72 | 58   | 165 | 45 | 8   |

| Catalog No. | Dimensions(mm) |    |      |      |      |       |      |     |
|-------------|----------------|----|------|------|------|-------|------|-----|
|             | φ              | D  | d    | L1   | L2   | L     | B    | A   |
| DL-B-10     | 8.5            | 9  | 6    | 31   | 20.5 | 59    | 13   | 2.2 |
| DL-B-16     | 8.5            | 10 | 6.3  | 30   | 22   | 64    | 14.5 | 2.2 |
| DL-B-25     | 8.5            | 11 | 7.5  | 30   | 22   | 68    | 16   | 2.8 |
| DL-B-35     | 10.5           | 12 | 8.5  | 37   | 25   | 71    | 17   | 2.8 |
| DL-B-50     | 10.7           | 14 | 10   | 35   | 27   | 78    | 20   | 3   |
| DL-B-70     | 12.5           | 16 | 11.3 | 43   | 30   | 89    | 23   | 4   |
| DL-B-95     | 12.5           | 18 | 13.5 | 44   | 33   | 97    | 26   | 3.7 |
| DL-B-120    | 14.8           | 20 | 15.3 | 49   | 37   | 103.5 | 28   | 4.2 |
| DL-B-150    | 16.5           | 22 | 17   | 49.5 | 35   | 110   | 30   | 5   |
| DL-B-185    | 16.5           | 24 | 18.5 | 56   | 42   | 118   | 34   | 5   |
| DL-B-240    | 16.5           | 27 | 21   | 58   | 44   | 128   | 32   | 6   |
| DL-B-300    | 20.5           | 30 | 23.5 | 65   | 50   | 142   | 42   | 6.3 |
| DL-B-400    | 22             | 38 | 27.5 | 82   | 60   | 174   | 50   | 8   |


## DTS series double hole copper terminal

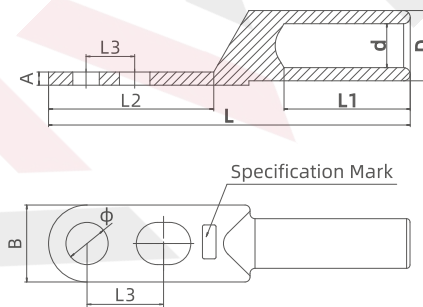

Material: Copper

| Catalog No. | Dimensions(mm) |    |      |     |    |     |      |      |    |
|-------------|----------------|----|------|-----|----|-----|------|------|----|
|             | $\phi$         | D  | d    | A   | B  | L   | L1   | L2   | L3 |
| DTS-16      | 8.5            | 10 | 6.5  | 2.4 | 16 | 81  | 32   | 38   | 20 |
| DTS-25      | 8.5            | 11 | 7.5  | 2.6 | 18 | 86  | 32   | 43   | 20 |
| DTS-35      | 8.5            | 12 | 8.5  | 2.8 | 20 | 100 | 37   | 48   | 20 |
| DTS-50      | 8.5            | 14 | 11   | 2.5 | 20 | 105 | 42   | 47.5 | 20 |
| DTS-70      | 10.5           | 16 | 11.7 | 3.2 | 25 | 117 | 44   | 56   | 25 |
| DTS-95      | 10.5           | 18 | 13.7 | 3.8 | 25 | 119 | 47   | 57   | 25 |
| DTS-120     | 12.5           | 20 | 15.5 | 4   | 30 | 132 | 50   | 63   | 30 |
| DTS-150     | 12.5           | 22 | 16.7 | 5   | 30 | 135 | 52   | 65   | 30 |
| DTS-185     | 12.5           | 25 | 19   | 5.3 | 38 | 153 | 56   | 73   | 35 |
| DTS-240     | 12.5           | 27 | 21.5 | 5.3 | 38 | 155 | 56   | 73   | 35 |
| DTS-300     | 16.5           | 30 | 23.5 | 6.2 | 49 | 170 | 57.5 | 85   | 40 |
| DTS-400     | 16.5           | 34 | 26.8 | 7.4 | 49 | 180 | 66.5 | 85   | 40 |


## DTLS series double hole copper aluminum terminal

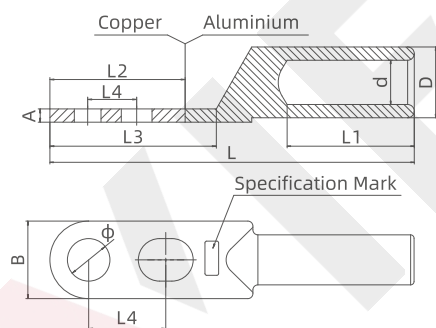

Material: Copper, aluminum

| Catalog No. | Dimensions(mm) |    |      |     |    |     |    |    |    |    |
|-------------|----------------|----|------|-----|----|-----|----|----|----|----|
|             | $\phi$         | D  | d    | A   | B  | L   | L1 | L2 | L3 | L4 |
| DTLS-25     | 8.5            | 12 | 7.5  | 2.8 | 18 | 98  | 36 | 38 | 44 | 20 |
| DTLS-35     | 8.5            | 14 | 8.8  | 3.2 | 20 | 106 | 41 | 42 | 49 | 20 |
| DTLS-50     | 8.5            | 16 | 10.5 | 3.2 | 20 | 110 | 44 | 42 | 51 | 20 |
| DTLS-70     | 10.5           | 18 | 12   | 4   | 25 | 125 | 46 | 51 | 57 | 25 |
| DTLS-95     | 10.5           | 20 | 13.8 | 4.5 | 25 | 135 | 51 | 52 | 60 | 25 |
| DTLS-120    | 12.5           | 23 | 15.5 | 4.2 | 30 | 147 | 55 | 57 | 64 | 30 |
| DTLS-150    | 12.5           | 24 | 17   | 5.2 | 30 | 153 | 58 | 65 | 74 | 30 |
| DTLS-185    | 12.5           | 27 | 19   | 5.7 | 38 | 165 | 60 | 70 | 80 | 35 |
| DTLS-240    | 12.5           | 30 | 21.5 | 6.5 | 38 | 170 | 61 | 70 | 80 | 35 |
| DTLS-300    | 16.5           | 34 | 24   | 7.2 | 49 | 200 | 72 | 70 | 90 | 40 |
| DTLS-400    | 16.5           | 38 | 26.5 | 7.5 | 49 | 202 | 75 | 80 | 92 | 40 |


## SC Series Wiring Terminal

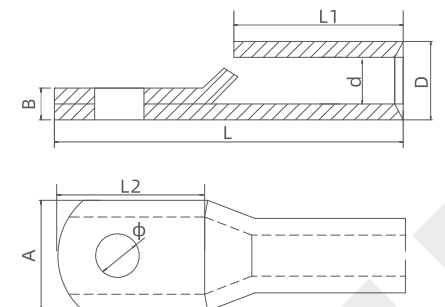

Material: Copper


| Catalog No. | Dimensions(mm) |      |     |      |      |      |      |      |
|-------------|----------------|------|-----|------|------|------|------|------|
|             | $\phi$         | A    | B   | D    | d    | L    | L1   | L2   |
| SC-6-6      | 6.5            | 9.5  | 1   | 5.5  | 4.5  | 24.5 | 7.5  | 13.7 |
| SC-6-8      | 8.5            | 11.5 | 0.5 |      |      |      |      |      |
| SC-10-6     | 6.5            | 10   | 1.5 |      |      |      |      |      |
| SC-10-8     | 8.5            | 11.3 | 1   | 7    | 5.4  | 26   | 14   | 13.2 |
| SC-10-10    | 10.5           | 14   | 0.8 |      |      |      |      |      |
| SC-16-6     | 6.5            | 12   | 1.8 |      |      |      |      |      |
| SC-16-8     | 8.5            | 12   | 1.8 | 8    | 6    | 31.7 | 12   | 17.3 |
| SC-16-10    | 10.5           | 14   | 1.3 |      |      |      |      |      |
| SC-25-6     | 6.5            | 13.3 | 1.7 | 9    | 7    | 33.7 | 12   | 17.5 |
| SC-25-8     | 8.5            |      |     |      |      |      |      |      |
| SC-25-10    | 10.5           |      |     |      |      |      |      |      |
| SC-35-6     | 6.5            | 15.3 | 1.9 | 11   | 8.7  | 38   | 13.4 | 19.3 |
| SC-35-8     | 8.5            |      |     |      |      |      |      |      |
| SC-35-10    | 10.5           |      |     |      |      |      |      |      |
| SC-50-8     | 8.5            | 18.1 | 2.4 | 12.5 | 9.9  | 42.3 | 15   | 20.5 |
| SC-50-10    | 10.5           |      |     |      |      |      |      |      |
| SC-50-12    | 12.5           |      |     |      |      |      |      |      |
| SC-70-8     | 8.5            | 21   | 2.6 | 14.5 | 11.7 | 49.3 | 17.5 | 25   |
| SC-70-10    | 10.5           |      |     |      |      |      |      |      |
| SC-70-12    | 12.5           |      |     |      |      |      |      |      |
| SC-95-8     | 8.5            | 24.5 | 2.9 | 17   | 13.8 | 54.5 | 21   | 26.8 |
| SC-95-10    | 10.5           |      |     |      |      |      |      |      |
| SC-95-12    | 12.5           |      |     |      |      |      |      |      |
| SC-120-8    | 8.5            | 27.7 | 3.3 | 19   | 15.6 | 62   | 23.5 | 29.8 |
| SC-120-10   | 10.5           |      |     |      |      |      |      |      |
| SC-120-12   | 12.5           |      |     |      |      |      |      |      |
| SC-120-14   | 14.5           | 30   | 3.8 | 21   | 17   | 71   | 24   | 33   |
| SC-150-10   | 10.5           |      |     |      |      |      |      |      |
| SC-150-12   | 12.5           |      |     |      |      |      |      |      |
| SC-150-14   | 14.5           | 33   | 4   | 23   | 19   | 88   | 31   | 39   |
| SC-185-12   | 12.5           |      |     |      |      |      |      |      |
| SC-185-14   | 14.5           |      |     |      |      |      |      |      |
| SC-185-16   | 16.5           | 37.2 | 4.4 | 26   | 21.6 | 87.5 | 33   | 43   |
| SC-240-12   | 12.5           |      |     |      |      |      |      |      |
| SC-240-14   | 14.5           |      |     |      |      |      |      |      |
| SC-240-16   | 15.5           |      |     |      |      |      |      |      |

## SC-JGYSeries Copper Terminal

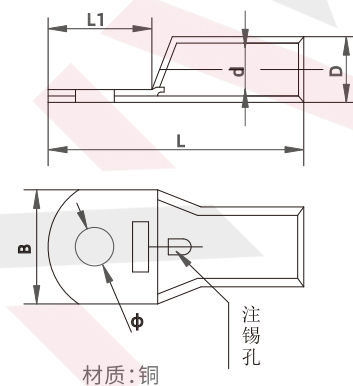

| 产品型号          | 尺寸(mm) |      |      |     |      |      |
|---------------|--------|------|------|-----|------|------|
|               | $\phi$ | D    | d    | L   | L1   | B    |
| SC-JGY-6-6    | 6.5    | 5.5  | 3.8  | 25  | 14   | 14   |
| SC-JGY-6-8    | 8.5    |      |      |     |      |      |
| SC-JGY-10-6   | 6.5    | 6.8  | 4.8  | 28  | 14   | 14   |
| SC-JGY-10-8   | 8.5    |      |      |     |      |      |
| SC-JGY-16-6   | 6.5    | 7.5  | 5.5  | 31  | 16   | 16   |
| SC-JGY-16-8   | 8.5    |      |      |     |      |      |
| SC-JGY-16-10  | 10.5   | 9    | 7    | 34  | 17   | 17   |
| SC-JGY-25-6   | 6.5    |      |      |     |      |      |
| SC-JGY-25-8   | 8.5    |      |      |     |      |      |
| SC-JGY-25-10  | 10.5   | 10.5 | 8.2  | 38  | 18   | 18   |
| SC-JGY-35-6   | 6.5    |      |      |     |      |      |
| SC-JGY-35-8   | 8.5    |      |      |     |      |      |
| SC-JGY-35-10  | 10.5   | 12.5 | 9.8  | 50  | 22   | 22   |
| SC-JGY-50-6   | 6.5    |      |      |     |      |      |
| SC-JGY-50-8   | 8.5    |      |      |     |      |      |
| SC-JGY-50-10  | 10.5   | 14.5 | 11.5 | 51  | 22.5 | 22.5 |
| SC-JGY-70-8   | 8.5    |      |      |     |      |      |
| SC-JGY-70-10  | 10.5   |      |      |     |      |      |
| SC-JGY-70-12  | 12.5   | 17.5 | 13.8 | 56  | 24   | 24   |
| SC-JGY-95-8   | 8.5    |      |      |     |      |      |
| SC-JGY-95-10  | 10.5   |      |      |     |      |      |
| SC-JGY-95-12  | 12.5   | 19.5 | 15.5 | 71  | 33   | 33   |
| SC-JGY-120-8  | 8.5    |      |      |     |      |      |
| SC-JGY-120-10 | 10.5   |      |      |     |      |      |
| SC-JGY-120-12 | 12.5   | 21   | 16.5 | 77  | 33.5 | 33.5 |
| SC-JGY-150-10 | 10.5   |      |      |     |      |      |
| SC-JGY-150-12 | 12.5   |      |      |     |      |      |
| SC-JGY-150-14 | 14.5   | 23.5 | 18.8 | 84  | 35.5 | 35.5 |
| SC-JGY-185-12 | 13     |      |      |     |      |      |
| SC-JGY-185-14 | 15     |      |      |     |      |      |
| SC-JGY-185-16 | 17     | 26.5 | 21   | 91  | 38.5 | 38.5 |
| SC-JGY-240-12 | 13     |      |      |     |      |      |
| SC-JGY-240-14 | 15     |      |      |     |      |      |
| SC-JGY-240-16 | 17     | 30   | 24   | 103 | 42   | 42   |
| SC-JGY-300-16 | 17     |      |      |     |      |      |
| SC-JGY-300-20 | 21     |      |      |     |      |      |
| SC-JGY-400-16 | 17     | 34   | 26.5 | 113 | 49   | 49   |
| SC-JGY-400-20 | 21     |      |      |     |      |      |


## JG Series Aluminum Terminal

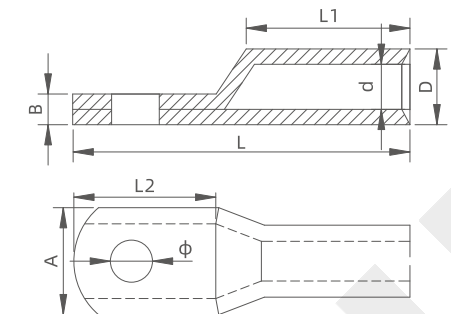

Material: Copper

| Catalog No. | Dimensions(mm) |      |     |    |      |      |      |      |
|-------------|----------------|------|-----|----|------|------|------|------|
|             | $\phi$         | A    | B   | D  | d    | L    | L1   | L2   |
| JG-10-6     | 6.5            | 11.3 | 1.9 | 8  | 6    | 38.3 | 17   | 16   |
| JG-10-8     | 8.5            |      |     |    |      |      |      |      |
| JG-16-6     | 6.5            | 12.2 | 2.6 | 9  | 6.2  | 41   | 17.2 | 18.7 |
| JG-16-8     | 8.5            |      |     |    |      |      |      |      |
| JG-25-8     | 8.5            | 13.8 | 2.6 | 10 | 7.2  | 46.5 | 21.5 | 19.5 |
| JG-25-10    | 10.5           |      |     |    |      |      |      |      |
| JG-35-8     | 8.5            | 15.5 | 2.6 | 11 | 8.2  | 50.5 | 20.3 | 20   |
| JG-35-10    | 10.5           |      |     |    |      |      |      |      |
| JG-35-12    | 12.5           |      |     |    |      |      |      |      |
| JG-50-8     | 8.5            | 18.4 | 2.8 | 13 | 10.2 | 53   | 20.3 | 22.3 |
| JG-50-10    | 10.5           |      |     |    |      |      |      |      |
| JG-50-12    | 12.5           |      |     |    |      |      |      |      |
| JG-70-8     | 8.5            | 22.7 | 3.7 | 16 | 12   | 59   | 20   | 27   |
| JG-70-10    | 10.5           |      |     |    |      |      |      |      |
| JG-70-12    | 12.5           |      |     |    |      |      |      |      |
| JG-95-8     | 8.5            | 25.6 | 3.8 | 18 | 14   | 65   | 22.6 | 31.8 |
| JG-95-10    | 10.5           |      |     |    |      |      |      |      |
| JG-95-12    | 12.5           |      |     |    |      |      |      |      |
| JG-120-8    | 8.5            | 28.6 | 3.7 | 20 | 16   | 72   | 31.4 | 31   |
| JG-120-10   | 10.5           |      |     |    |      |      |      |      |
| JG-120-12   | 12.5           |      |     |    |      |      |      |      |
| JG-120-14   | 14.5           | 31.5 | 3.8 | 22 | 18   | 79   | 33   | 36.5 |
| JG-150-12   | 12.5           |      |     |    |      |      |      |      |
| JG-150-14   | 14.5           |      |     |    |      |      |      |      |
| JG-150-16   | 10.5           | 34.4 | 4.9 | 24 | 19   | 87.5 | 35   | 40.5 |
| JG-185-12   | 12.5           |      |     |    |      |      |      |      |
| JG-185-14   | 14.5           |      |     |    |      |      |      |      |
| JG-185-16   | 16.5           | 37.3 | 4.9 | 26 | 21   | 93   | 42   | 40.5 |
| JG-240-12   | 12.5           |      |     |    |      |      |      |      |
| JG-240-14   | 14.5           |      |     |    |      |      |      |      |
| JG-240-16   | 16.5           |      |     |    |      |      |      |      |


## DTX Series Copper Terminal

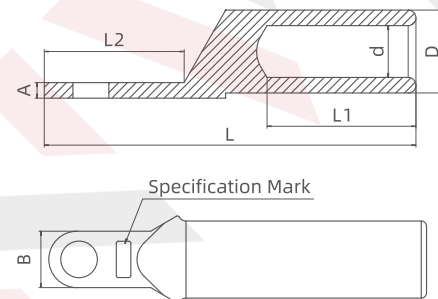

Material: Copper

| Catalog No. | Dimensions(mm) |    |      |    |    |     |    |     |
|-------------|----------------|----|------|----|----|-----|----|-----|
|             | $\phi$         | D  | d    | L1 | L2 | L   | B  | A   |
| DT-X-35     | 8.5            | 12 | 8.3  | 39 | 28 | 78  | 16 | 2.8 |
| DT-X-50     | 8.5            | 13 | 10   | 40 | 27 | 80  | 16 | 3.1 |
| DT-X-70     | 8.5            | 15 | 11.8 | 42 | 28 | 86  | 16 | 3.4 |
| DT-X-95     | 10.5           | 17 | 13.8 | 42 | 29 | 86  | 18 | 3.8 |
| DT-X-120    | 10.5           | 19 | 15.7 | 45 | 29 | 92  | 18 | 4.2 |
| DT-X-150    | 10.5           | 21 | 16.5 | 54 | 33 | 104 | 18 | 4.2 |
| DT-X-185    | 10.5           | 24 | 18.5 | 59 | 33 | 111 | 18 | 4.8 |
| DT-X-240    | 10.5           | 26 | 21.5 | 54 | 35 | 110 | 18 | 5.7 |


## DTLX Series Bimetal Terminal

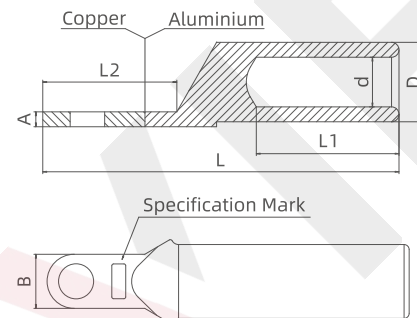

Material: Copper, aluminum

| Catalog No. | Dimensions(mm) |    |      |    |    |     |    |     |
|-------------|----------------|----|------|----|----|-----|----|-----|
|             | $\phi$         | D  | d    | L1 | L2 | L   | B  | A   |
| DTL-X-35    | 8.5            | 14 | 9    | 42 | 28 | 83  | 16 | 3   |
| DTL-X-50    | 8.5            | 16 | 10.5 | 47 | 28 | 90  | 16 | 3.2 |
| DTL-X-70    | 8.5            | 18 | 11.5 | 47 | 28 | 93  | 16 | 3.8 |
| DTL-X-95    | 8.5            | 20 | 13.8 | 50 | 28 | 97  | 16 | 4.6 |
| DTL-X-120   | 10.5           | 22 | 15   | 52 | 35 | 102 | 16 | 4.8 |
| DTL-X-150   | 10.1           | 25 | 17   | 56 | 35 | 113 | 18 | 5.5 |
| DTL-X-185   | 10.1           | 27 | 18.5 | 58 | 35 | 117 | 18 | 6   |
| DTL-X-240   | 10.1           | 30 | 21.5 | 60 | 35 | 125 | 18 | 6.8 |
| DTL-X-300   | 12.5           | 32 | 23.5 | 65 | 35 | 130 | 22 | 7   |


## DTF Series Copper Terminal

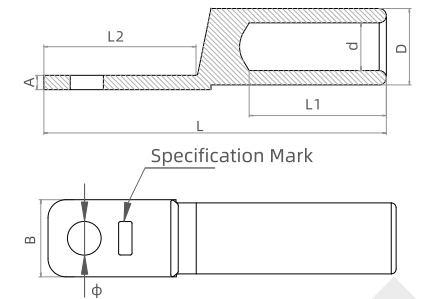

Material: Copper

| Catalog No. | Dimensions(mm) |    |      |    |      |     |      |     |
|-------------|----------------|----|------|----|------|-----|------|-----|
|             | $\phi$         | D  | d    | L1 | L2   | L   | B    | A   |
| DTF-10      | 8.5            | 9  | 5.8  | 28 | 22   | 58  | 14.7 | 2.5 |
| DTF-16      | 8.5            | 10 | 6.8  | 28 | 22   | 58  | 14.7 | 2.5 |
| DTF-25      | 8.5            | 11 | 7.8  | 33 | 22   | 65  | 14.7 | 3.1 |
| DTF-35      | 8.5            | 12 | 8.8  | 33 | 22   | 66  | 14.7 | 3   |
| DTF-50      | 10.5           | 14 | 10   | 38 | 25.5 | 73  | 15.7 | 4   |
| DTF-70      | 12.5           | 16 | 11.8 | 46 | 29   | 85  | 19.7 | 4.3 |
| DTF-95      | 12.5           | 18 | 13.6 | 46 | 29   | 85  | 19.7 | 5   |
| DTF-120     | 14.5           | 20 | 15.5 | 54 | 32   | 99  | 23.7 | 5   |
| DTF-150     | 14.5           | 22 | 16.8 | 55 | 32   | 101 | 23.7 | 6   |
| DTF-185     | 16.5           | 25 | 18.8 | 56 | 38   | 109 | 25.7 | 7.1 |
| DTF-240     | 16.5           | 27 | 21.5 | 59 | 38   | 111 | 25.7 | 7.2 |

## DTL Series Bimetal Terminal

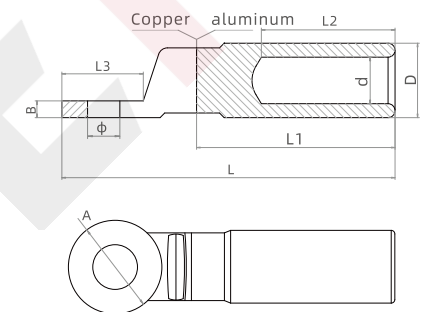


Material: Copper, aluminum

| Catalog No. | Dimensions(mm) |     |     |      |    |      |    |     |        |
|-------------|----------------|-----|-----|------|----|------|----|-----|--------|
|             | L              | L1  | L2  | L3   | D  | d    | A  | B   | $\phi$ |
| DTL-16      | 85             | 57  | 48  | 19.5 | 16 | 5.8  | 22 | 3   | 11.2   |
| DTL-25      | 85             | 57  | 48  | 19.5 | 16 | 6.6  | 22 | 3   | 11.2   |
| DTL-35      | 85             | 57  | 48  | 19.5 | 16 | 8.2  | 22 | 3   | 11.2   |
| DTL-50      | 100            | 68  | 57  | 25   | 20 | 9.2  | 25 | 4.2 | 13.3   |
| DTL-70      | 100            | 68  | 57  | 25   | 20 | 11.5 | 25 | 4.2 | 13.3   |
| DTL-95      | 100            | 68  | 57  | 25   | 20 | 13.3 | 25 | 4.2 | 13.3   |
| DTL-120     | 114            | 72  | 67  | 32   | 25 | 13.7 | 32 | 5.2 | 13.3   |
| DTL-150     | 114            | 72  | 67  | 32   | 25 | 15.7 | 32 | 5.2 | 13.3   |
| DTL-185     | 125            | 80  | 69  | 33   | 32 | 17.7 | 33 | 6.2 | 13.3   |
| DTL-240     | 125            | 80  | 69  | 33   | 32 | 19.8 | 33 | 6.2 | 13.3   |
| DTL-300     | 135            | 82  | 70  | 37   | 34 | 22.8 | 37 | 7.2 | 13.3   |
| DTL-400     | 160            | 109 | 90  | 38   | 40 | 26   | 37 | 7.2 | 13.3   |
| DTL-500     | 160            | 109 | 90  | 38   | 40 | 29   | 37 | 7.5 | 13.3   |
| DTL-630     | 185            | 122 | 100 | 43   | 47 | 33   | 37 | 9.5 | 13.3   |




## DTLC-1 Series Bimetal Terminal

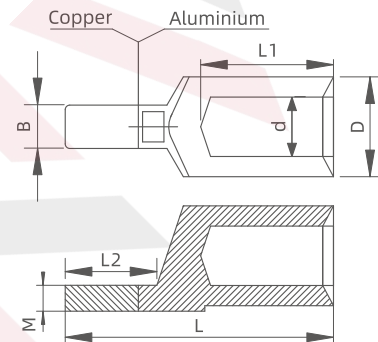

Material: Copper, aluminum

| Catalog No. | Dimensions(mm) |    |    |    |      |   |   |
|-------------|----------------|----|----|----|------|---|---|
|             | L              | L1 | L2 | D  | d    | B | M |
| DTLC-1-10   | 47             | 23 | 18 | 10 | 5.5  | 7 | 5 |
| DTLC-1-16   | 47             | 23 | 18 | 10 | 6.3  | 7 | 5 |
| DTLC-1-25   | 48.5           | 23 | 18 | 11 | 7.2  | 7 | 5 |
| DTLC-1-35   | 51             | 22 | 18 | 12 | 8    | 7 | 5 |
| DTLC-1-50   | 54             | 24 | 18 | 14 | 9.5  | 7 | 5 |
| DTLC-1-70   | 54.5           | 24 | 18 | 16 | 11.5 | 7 | 5 |


## C45 Series cable terminal

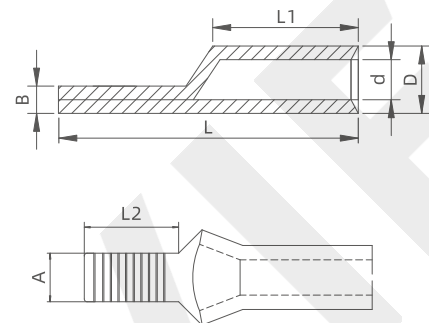

Material: Aluminum

| Catalog No. | Dimensions(mm) |      |      |      |      |      |     |
|-------------|----------------|------|------|------|------|------|-----|
|             | D              | d    | L    | L1   | L2   | A    | B   |
| C45-4       | 5              | 4    | 22.7 | 6    | 10   | 5.2  | 1   |
| C45-6       | 5.5            | 4.5  | 25   | 14   | 10   | 5.2  | 1   |
| C45-10      | 6              | 5    | 28.7 | 15   | 12   | 6.3  | 1   |
| C45-16      | 8              | 6.4  | 32.5 | 19.2 | 12   | 7.2  | 1.8 |
| C45-25      | 9              | 7.2  | 36   | 21.5 | 12   | 6.8  | 2   |
| C45-35      | 11             | 9.2  | 36   | 21   | 12   | 6.8  | 2.1 |
| C45-50      | 12.5           | 10.7 | 41   | 21   | 12   | 6.8  | 1.8 |
| C45-70      | 15             | 12.4 | 45   | 20   | 12   | 8.3  | 2.6 |
| C45-95      | 16             | 13.2 | 47.5 | 24.5 | 15.8 | 10.5 | 2.8 |
| C45-120     | 18             | 14.8 | 54   | 26.5 | 15.8 | 10.5 | 3.2 |

## GT Series Copper And Aluminum Wiring Tube

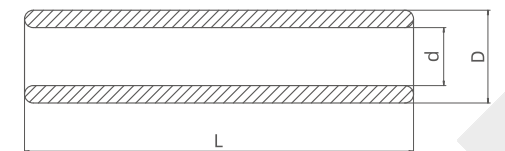


Material: Copper, Aluminum

| 产品型号   | 尺寸(mm) |    |      |  |        |    |     |
|--------|--------|----|------|--|--------|----|-----|
|        | Type B |    |      |  | Type A |    |     |
|        | L      | D  | d    |  | L      | D  | d   |
| GT-10  | 51     | 8  | 6    |  | 51     | 8  | 6   |
| GT-16  | 54     | 9  | 7.2  |  | 54     | 9  | 6.2 |
| GT-25  | 59     | 10 | 8    |  | 59     | 10 | 7.2 |
| GT-35  | 61     | 11 | 9    |  | 61     | 12 | 8.2 |
| GT-50  | 68     | 13 | 10.6 |  | 68     | 14 | 10  |
| GT-70  | 81     | 15 | 12.2 |  | 81     | 16 | 12  |
| GT-95  | 83     | 17 | 13.8 |  | 83     | 18 | 14  |
| GT-120 | 94     | 19 | 15.6 |  | 94     | 20 | 16  |
| GT-150 | 97     | 21 | 17   |  | 97     | 22 | 17  |
| GT-185 | 105    | 23 | 19   |  | 105    | 25 | 119 |
| GT-240 | 112    | 26 | 21.8 |  | 112    | 27 | 21  |
| GT-300 | 114    | 30 | 24.4 |  | 114    | 31 | 24  |
| GT-400 | 143    | 32 | 25.4 |  | 143    | 34 | 26  |
| GT-500 | -      | -  | -    |  | 165    | 38 | 30  |

| 产品型号   | 尺寸(mm) |    |      |  |        |    |      |
|--------|--------|----|------|--|--------|----|------|
|        | Type B |    |      |  | Type A |    |      |
|        | L      | D  | d    |  | L      | D  | d    |
| GL-10  | 64     | 8  | 5    |  | 64     | 9  | 6    |
| GL-16  | 64     | 10 | 7    |  | 64     | 10 | 5.6  |
| GL-25  | 68     | 11 | 8    |  | 70     | 12 | 7.2  |
| GL-35  | 72     | 12 | 9    |  | 72     | 14 | 8.6  |
| GL-50  | 74     | 14 | 10   |  | 80     | 16 | 10   |
| GL-70  | 82     | 16 | 12   |  | 90     | 18 | 11.6 |
| GL-95  | 92     | 18 | 14   |  | 95     | 21 | 13.8 |
| GL-120 | 94     | 20 | 17.5 |  | 101    | 23 | 15   |
| GL-150 | 104    | 22 | 17.5 |  | 105    | 25 | 17   |
| GL-185 | 110    | 24 | 19   |  | 110    | 27 | 18.6 |
| GL-240 | 114    | 27 | 21   |  | 120    | 30 | 21   |
| GL-300 | 135    | 30 | 23.4 |  | 140    | 34 | 22.8 |
| GL-400 | 138    | 34 | 26   |  | 142    | 38 | 26.4 |




## GTL Series Copper And Aluminum Wiring Tube

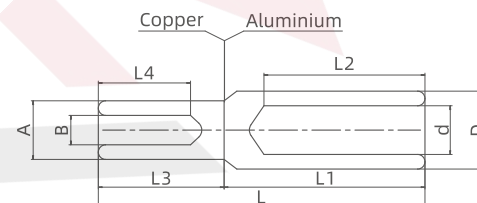

Material: Copper, aluminum

| Catalog No. | Dimensions(mm) |    |      |    |    |    |      |    |    |
|-------------|----------------|----|------|----|----|----|------|----|----|
|             | L              | D  | d    | L1 | L2 | A  | B    | L3 | L4 |
| GTL-10      | 65             | 10 | 6.5  | 39 | 32 | 8  | 4.2  | 26 | 22 |
| GTL-16      | 70             | 10 | 6.5  | 40 | 33 | 9  | 5.5  | 30 | 25 |
| GTL-25      | 75             | 11 | 7.5  | 44 | 36 | 10 | 6.5  | 31 | 27 |
| GTL-35      | 82             | 13 | 8.7  | 49 | 40 | 12 | 7.5  | 33 | 29 |
| GTL-50      | 93             | 15 | 10   | 55 | 47 | 13 | 8.7  | 37 | 32 |
| GTL-70      | 100            | 18 | 12   | 60 | 50 | 14 | 9.7  | 40 | 35 |
| GTL-95      | 105            | 20 | 13.7 | 63 | 52 | 16 | 11.7 | 42 | 37 |
| GTL-120     | 110            | 22 | 15.3 | 65 | 55 | 19 | 13.7 | 45 | 40 |
| GTL-150     | 115            | 24 | 16.8 | 68 | 58 | 21 | 15.5 | 47 | 42 |
| GTL-185     | 125            | 27 | 18.8 | 73 | 62 | 23 | 16.8 | 52 | 46 |
| GTL-240     | 135            | 30 | 21.5 | 79 | 65 | 25 | 18.8 | 56 | 50 |
| GTL-300     | 145            | 34 | 24   | 85 | 70 | 28 | 21.5 | 60 | 52 |

## GTY Series Wiring Tube

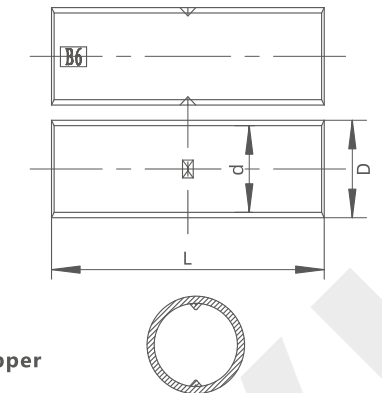


Material: Copper

| Catalog No. | Dimensions(mm) |      |     |
|-------------|----------------|------|-----|
|             | D              | d    | L   |
| GTU-2-1.5   | 3.1            | 1.9  | 20  |
| GTU-2-2.5   | 4              | 2.9  | 20  |
| GTU-2-4     | 4.5            | 3.3  | 20  |
| GTU-2-6     | 5.1            | 3.8  | 25  |
| GTU-2-10    | 6              | 4.5  | 30  |
| GTU-2-16    | 7.3            | 5.8  | 35  |
| GTU-2-25    | 9              | 7.3  | 40  |
| GTU-2-35    | 10.7           | 8.7  | 45  |
| GTU-2-50    | 12.5           | 10   | 50  |
| GTU-2-70    | 14.5           | 11.7 | 55  |
| GTU-2-95    | 17             | 13.8 | 60  |
| GTU-2-120   | 19             | 15   | 65  |
| GTU-2-150   | 21             | 17   | 70  |
| GTU-2-185   | 23.5           | 19.5 | 75  |
| GTU-2-240   | 26             | 21   | 80  |
| GTU-2-300   | 30             | 24   | 85  |
| GTU-2-400   | 34             | 27   | 90  |
| GTU-2-500   | 38             | 30   | 100 |
| GTU-2-630   | 44             | 35   | 110 |

## BN Series Wiring Tube



Material: Copper

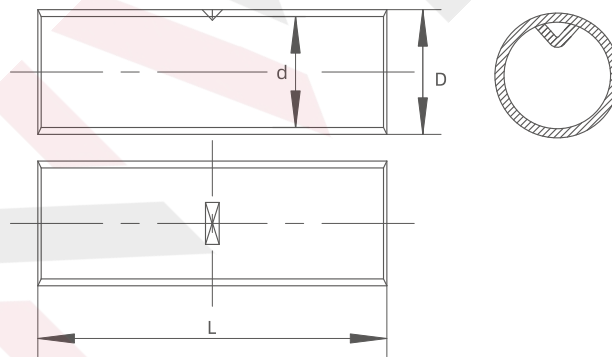


| Catalog No. | Dimensions(mm) |      |    |
|-------------|----------------|------|----|
|             | D              | d    | L  |
| BN1.25      | 3.3            | 2.1  | 15 |
| BN2         | 4              | 2.7  | 15 |
| BN3.5       | 4.9            | 3.5  | 15 |
| BN5.5       | 5.6            | 4    | 15 |
| BN8         | 7.1            | 5.1  | 21 |
| BN14        | 9              | 6.8  | 26 |
| BN22        | 11.5           | 8.5  | 29 |
| BN38        | 13             | 10   | 32 |
| BN60        | 14.5           | 11.6 | 35 |
| BN70        | 15.9           | 12.2 | 38 |
| BN80        | 18             | 14   | 38 |
| BN100       | 20.5           | 16   | 38 |

## M Series Wiring Tube




Material: Copper

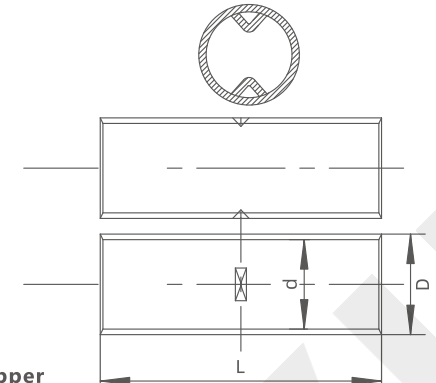

| Catalog No. | Dimensions(mm) |      |     |
|-------------|----------------|------|-----|
|             | D              | d    | L   |
| M1.5        | 4              | 2.5  | 22  |
| M2.5        | 4.3            | 2.8  | 22  |
| M4          | 4.8            | 3.1  | 25  |
| M6          | 5.5            | 3.9  | 25  |
| M10         | 6.9            | 4.6  | 25  |
| M16         | 7.8            | 5.6  | 29  |
| M25         | 9.5            | 7.1  | 29  |
| M35         | 11             | 8.4  | 35  |
| M40         | 11.2           | 9    | 35  |
| M50         | 12.5           | 9.6  | 35  |
| M70         | 15             | 11.6 | 45  |
| M95         | 17             | 13.6 | 47  |
| M120        | 20             | 15.6 | 52  |
| M150        | 21             | 16.6 | 59  |
| M185        | 23.5           | 18.5 | 65  |
| M240        | 26.5           | 21.3 | 75  |
| M300        | 28.5           | 23.3 | 90  |
| M400        | 32.8           | 27   | 106 |




## OT Series Open Nose

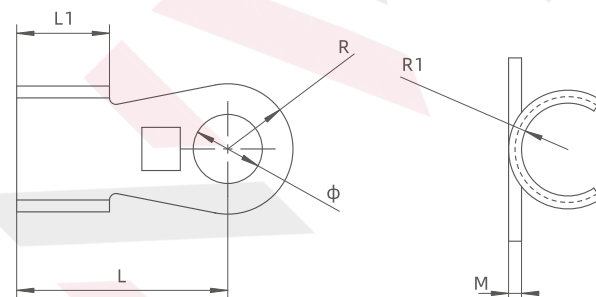

Material: Copper

| Catalog No. | Dimensions(mm) |      |      |      |     |        |
|-------------|----------------|------|------|------|-----|--------|
|             | ϕ              | L    | R    | R1   | M   | Type B |
| OT-5A       | 5.2            | 12.1 | 5    | 2    | 0.5 | -      |
| OT-10A      | 5.2            | 14.5 | 6    | 3    | 0.6 | -      |
| OT-20A      | 6.2            | 17.3 | 7.3  | 3.7  | 0.9 | 0.7    |
| OT-30A      | 6.2            | 17.3 | 7.5  | 3.8  | 1   | 0.8    |
| OT-40A      | 6.2            | 19.8 | 8.8  | 4.2  | 1.1 | 0.85   |
| OT-50A      | 6.2            | 21.5 | 9.3  | 4.2  | 1.2 | 0.9    |
| OT-60A      | 8.2            | 23   | 10.5 | 4.4  | 1.3 | 1      |
| OT-80A      | 8.2            | 25.5 | 11   | 5.2  | 1.4 | 1      |
| OT-100A     | 8.2            | 29   | 12   | 5.5  | 1.5 | 1      |
| OT-150A     | 10.2           | 31   | 12.5 | 6    | 1.7 | 1.3    |
| OT-200A     | 10.2           | 32.3 | 13.5 | 7.9  | 1.8 | 1.4    |
| OT-250A     | 10.2           | 34.7 | 14.5 | 9.2  | 1.9 | 1.5    |
| OT-300A     | 12.2           | 38   | 16.5 | 10   | 2   | 1.6    |
| OT-400A     | 14.2           | 41.8 | 18   | 10   | 2.3 | 1.7    |
| OT-500A     | 14.2           | 46   | 20.5 | 10.5 | 2.5 | 1.8    |
| OT-600A     | 16.2           | 48.9 | 21.5 | 10.7 | 3   | 2      |
| OT-800A     | 18.2           | 58   | 27   | 16.5 | 3   | -      |
| OT-1000A    | 18.2           | 65   | 33   | 19   | 3.4 | -      |
| OT-1500A    | 20.2           | 77.5 | 40   | 19.5 | 3.8 | -      |

## RV Series Pre-insulated Terminal

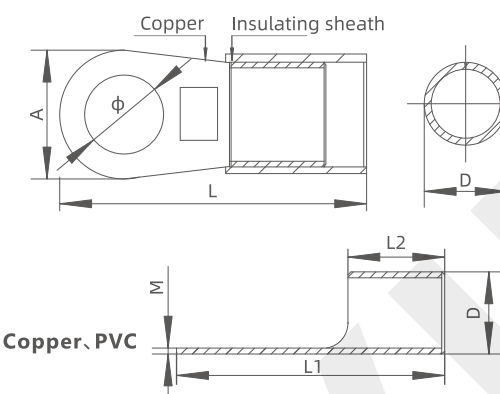

Material: Copper, PVC


| Catalog No. | Dimensions(mm) |      |      |     |      |     |    |
|-------------|----------------|------|------|-----|------|-----|----|
|             | ϕ              | A    | M    | D   | L1   | L2  | L  |
| RV-1.25-3   | 3.3            | 5.6  | 0.55 | 3.1 | 11.6 | 4   | 18 |
| RV-1.25-4   | 4.3            | 6.6  | 0.55 | 3.1 | 13.6 | 4   | 20 |
| RV-1.25-5   | 5.3            | 8    | 0.55 | 3.1 | 14.5 | 4   | 21 |
| RV-12.5-6   | 6.5            | 11.6 | 0.55 | 3.1 | 19.5 | 4   | 25 |
| RV-1.25-8   | 8.5            | 11.6 | 0.55 | 3.1 | 19.5 | 4   | 26 |
| RV-2-3      | 3.3            | 6    | 0.55 | 3.7 | 12.3 | 5   | 18 |
| RV-2.4      | 4.3            | 6.6  | 0.55 | 3.7 | 13.8 | 5   | 20 |
| RV-2-5      | 5.3            | 8.5  | 0.55 | 3.7 | 15.5 | 5   | 22 |
| RV-2-6      | 6.5            | 11.6 | 0.55 | 3.7 | 19.2 | 5   | 26 |
| RV-3.5-4    | 4.3            | 7.9  | 0.65 | 4.7 | 16.2 | 6.2 | 24 |
| RV-3.5-5    | 5.3            | 7.9  | 0.65 | 4.7 | 16.2 | 6.2 | 25 |
| RV-3.5-6    | 6.5            | 11.6 | 0.65 | 4.7 | 19.4 | 6.2 | 28 |
| RV-3.5-8    | 8.5            | 14.3 | 0.65 | 4.7 | 25.1 | 6.2 | 34 |
| RV-5.5-4    | 4.3            | 7.2  | 0.75 | 5.2 | 15   | 6.6 | 23 |
| RV-5.5-5    | 5.3            | 9.5  | 0.75 | 5.2 | 15   | 6.6 | 26 |
| RV-5.5-6    | 6.5            | 11.6 | 0.75 | 5.2 | 19.8 | 6.6 | 27 |
| RV-5.5-8    | 8.5            | 14.8 | 0.75 | 5.2 | 26.1 | 6.6 | 34 |

Color: Red, Green, Blue, Grey, Yellow, White, Black

## FDD Series Pre-insulated Terminal



Material: Copper, PVC

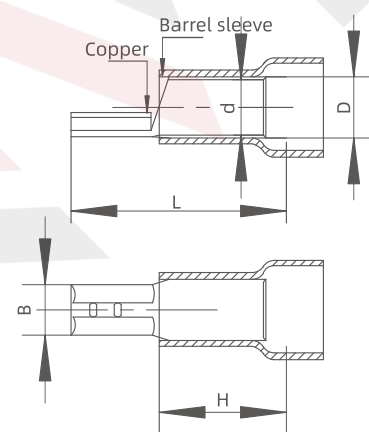


| Catalog No.    | Dimensions(mm) |     |     |      |      |
|----------------|----------------|-----|-----|------|------|
|                | B              | d   | D   | L    | H    |
| FDD1.25-110(5) | 3.8            | 1.7 | 3.8 | 19.0 | 10.0 |
| FDD1.25-110(8) | 3.8            | 1.7 | 3.8 | 19.0 | 10.0 |
| FDD1.25-187(5) | 5.6            | 1.7 | 3.8 | 19.0 | 10.0 |
| FDD1.25-187(8) | 5.6            | 1.7 | 3.8 | 19.0 | 10.0 |
| FDD1.25-205    | 6.5            | 1.7 | 3.8 | 20.0 | 10.0 |
| FDD1.25-250    | 7.4            | 1.7 | 3.8 | 21.0 | 10.0 |
| FDD2-110(5)    | 3.8            | 2.3 | 4.3 | 19.0 | 10.0 |
| FDD2-110(8)    | 3.8            | 2.3 | 4.3 | 19.0 | 10.0 |
| FDD2-187(5)    | 5.6            | 2.3 | 4.3 | 19.0 | 10.0 |
| FDD2-187(8)    | 5.6            | 2.3 | 4.3 | 19.0 | 10.0 |
| FDD2-205       | 6.5            | 2.3 | 4.3 | 20.0 | 10.0 |
| FDD2-250       | 7.4            | 2.3 | 4.3 | 21.0 | 10.0 |
| FDD2-312       | 9.0            | 2.3 | 4.3 | 23.0 | 10.0 |
| FDD5.5-250     | 7.4            | 3.4 | 5.7 | 25.0 | 13.0 |
| FDD5.5-375     | 10.9           | 3.4 | 5.7 | 29.6 | 13.0 |

Color: Red, Green, Blue, Grey, Yellow, White, Black

## MDD Series Pre-insulated Terminal




Material: Copper, PVC

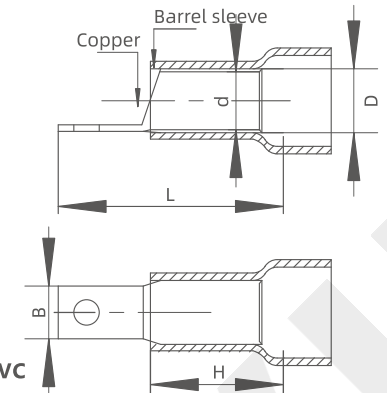

| Catalog No.    | Dimensions(mm) |     |     |      |      |
|----------------|----------------|-----|-----|------|------|
|                | B              | d   | D   | L    | H    |
| MDD1.25-110(5) | 2.8            | 1.7 | 4.3 | 17.7 | 10.0 |
| MDD1.25-110(8) | 2.8            | 1.7 | 4.3 | 17.7 | 10.0 |
| MDD1.25-187(5) | 4.75           | 1.7 | 4.3 | 20.0 | 10.0 |
| MDD1.25-187(8) | 4.75           | 1.7 | 4.3 | 20.0 | 10.0 |
| MDD1.25-250    | 6.35           | 1.7 | 4.3 | 21.0 | 10.0 |
| MDD1.25-110(5) | 2.8            | 2.3 | 4.3 | 7.7  | 10.0 |
| MDD1.25-110(8) | 2.8            | 2.3 | 4.3 | 7.7  | 10.0 |
| MDD2-187(5)    | 4.75           | 2.3 | 4.3 | 20.0 | 10.0 |
| MDD2-187(8)    | 4.75           | 2.3 | 4.3 | 20.0 | 10.0 |
| MDD2-250       | 6.35           | 2.3 | 4.3 | 21.0 | 10.0 |
| MDD5.5-250     | 6.35           | 3.4 | 5.7 | 25.0 | 13.0 |

Color: Red, Green, Blue, Grey, Yellow, White, Black

## SV Series Pre-insulated Terminal

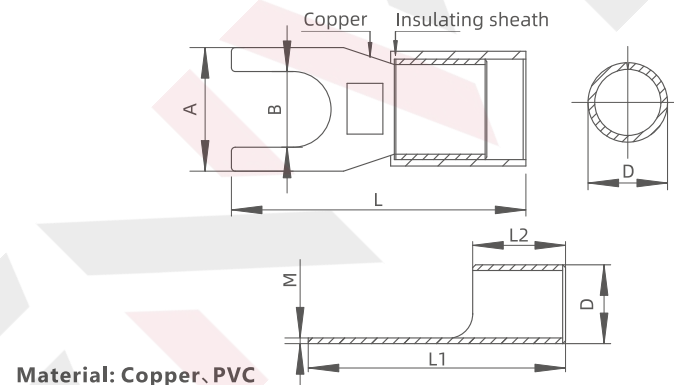


Material: Copper, PVC

| Catalog No. | Dimensions(mm) |     |      |     |      |     |    |
|-------------|----------------|-----|------|-----|------|-----|----|
|             | B              | A   | M    | D   | L1   | L2  | L  |
| SV-1.25-3   | 3.2            | 5.5 | 0.55 | 3.1 | 13.9 | 4   | 20 |
| SV-1.25-4   | 4.3            | 6.4 | 0.55 | 3.1 | 14.9 | 4   | 21 |
| SV-1.25-5   | 5.3            | 8   | 0.55 | 3.1 | 15   | 4   | 21 |
| SV-12.5-6   | 6.3            | 9.5 | 0.55 | 3.1 | 15.1 | 4   | 21 |
| SV-2-3      | 3.2            | 5.6 | 0.55 | 3.7 | 15   | 5   | 21 |
| SV-2-4      | 4.3            | 6.4 | 0.55 | 3.7 | 15   | 5   | 21 |
| SV-2-5      | 5.3            | 8   | 0.55 | 3.7 | 16   | 5   | 22 |
| SV-2-6      | 6.3            | 9.5 | 0.55 | 3.7 | 15   | 5   | 21 |
| SV-3.5-4    | 4.3            | 7.6 | 0.65 | 4.7 | 17.7 | 6.2 | 25 |
| SV-3.5-5    | 5.3            | 7.8 | 0.65 | 4.7 | 17.7 | 6.2 | 25 |
| SV-3.5-6    | 6.3            | 10  | 0.65 | 4.7 | 18.6 | 6.2 | 26 |
| SV-5.5-4    | 4.3            | 7.7 | 0.75 | 5.2 | 17.3 | 6.6 | 25 |
| SV-5.5-5    | 5.3            | 8.7 | 0.75 | 5.2 | 17.3 | 6.6 | 25 |
| SV-5.5-6    | 6.3            | 8.7 | 0.75 | 5.2 | 18.3 | 6.6 | 26 |

Color: Red, Green, Blue, Grey, Yellow, White, Black

## E Series Pre-insulated Terminal

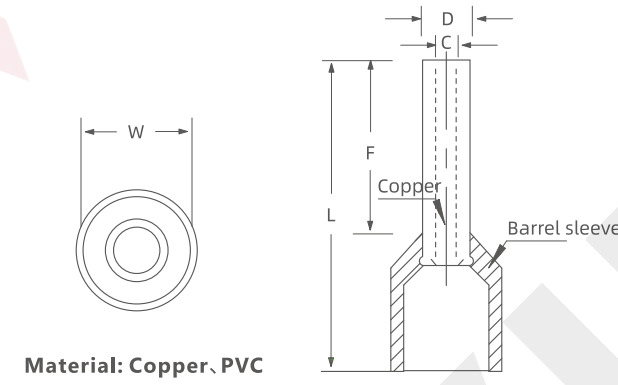


Material: Copper, PVC

| Catalog No. | Dimensions(mm) |      |      |      |      |                |                 |
|-------------|----------------|------|------|------|------|----------------|-----------------|
|             | F              | L    | W    | D    | C    | A.W.G          | mm <sup>2</sup> |
| E0505       | 5.0            | 11.0 | 2.6  | 1.3  | 1.0  | 22             | 0.5             |
| E0506       | 6.0            | 12.0 |      |      |      |                |                 |
| E0508       | 8.0            | 14.0 |      |      |      |                |                 |
| E0510       | 10.0           | 16.0 |      |      |      |                |                 |
| E0512       | 12.0           | 18.0 | 2.8  | 1.5  | 1.2  | 20             | 0.75            |
| E7506       | 6.0            | 12.3 |      |      |      |                |                 |
| E7508       | 8.0            | 14.3 |      |      |      |                |                 |
| E7510       | 10.0           | 16.3 |      |      |      |                |                 |
| E7518       | 12.0           | 18.3 | 3.0  | 1.7  | 1.4  | 18             | 1.0             |
| E1006       | 18.0           | 24.3 |      |      |      |                |                 |
| E1008       | 6.0            | 12.3 |      |      |      |                |                 |
| E1010       | 8.0            | 14.3 |      |      |      |                |                 |
| E1012       | 10.0           | 16.3 | 3.5  | 2.0  | 1.7  | 16             | 1.5             |
| E1018       | 12.0           | 18.3 |      |      |      |                |                 |
| E1508       | 18.0           | 24.3 |      |      |      |                |                 |
| E1510       | 8.0            | 14.3 |      |      |      |                |                 |
| E1512       | 10.0           | 16.3 | 4.0  | 2.6  | 2.3  | 14             | 2.5             |
| E1515       | 12.0           | 18.3 |      |      |      |                |                 |
| E1518       | 15.0           | 21.3 |      |      |      |                |                 |
| E2508       | 18.0           | 24.3 |      |      |      |                |                 |
| E2510       | 8.0            | 15.4 | 4.5  | 3.2  | 2.8  | 12             | 4.0             |
| E2512       | 10.0           | 17.4 |      |      |      |                |                 |
| E2518       | 12.0           | 19.4 |      |      |      |                |                 |
| E2518       | 18.0           | 25.4 |      |      |      |                |                 |
| E2525       | 25.0           | 32.4 | 6.0  | 3.9  | 3.5  | 10             | 6.0             |
| E4009       | 9.0            | 16.4 |      |      |      |                |                 |
| E4010       | 10.0           | 17.4 |      |      |      |                |                 |
| E4012       | 12.0           | 19.4 |      |      |      |                |                 |
| E4018       | 18.0           | 25.4 | 7.5  | 4.9  | 4.5  | 8              | 10              |
| E6012       | 12.0           | 20.5 |      |      |      |                |                 |
| E6018       | 18.0           | 26.5 |      |      |      |                |                 |
| E10-12      | 12.0           | 20.8 |      |      |      |                |                 |
| E10-18      | 18.0           | 26.8 | 8.7  | 6.2  | 5.8  | 6              | 16              |
| E16-12      | 12.0           | 22.0 |      |      |      |                |                 |
| E16-18      | 18.0           | 28.0 |      |      |      |                |                 |
| E25-12      | 12.0           | 24.0 |      |      |      |                |                 |
| E25-16      | 16.0           | 28.0 | 11.0 | 7.9  | 7.5  | 4              | 25              |
| E25-18      | 18.0           | 30.0 |      |      |      |                |                 |
| E25-22      | 22.0           | 34.0 |      |      |      |                |                 |
| E35-16      | 16.0           | 30.0 |      |      |      |                |                 |
| E35-18      | 18.0           | 32.0 | 12.5 | 8.7  | 8.3  | 2              | 35              |
| E35-22      | 22.0           | 36.0 |      |      |      |                |                 |
| E35-25      | 25.0           | 39.0 |      |      |      |                |                 |
| E50-12      | 12.0           | 28.0 |      |      |      |                |                 |
| E50-20      | 20.0           | 36.0 | 15.0 | 10.9 | 10.3 | 1/0            | 50              |
| E70-20      | 20.0           | 37.0 |      |      |      |                |                 |
| E70-25      | 25.0           | 42.0 |      |      |      |                |                 |
| E70-27      | 27.0           | 44.0 |      |      |      |                |                 |
| E95-25      | 25.0           | 44.0 | 18.5 | 15.6 | 14.8 | 3/0            | 95              |
| E120-27     | 27.0           | 47.6 |      |      |      |                |                 |
| E120-32     | 32.0           | 52.6 |      |      |      |                |                 |
| E150-25     | 25.0           | 50.6 |      |      |      |                |                 |
| E150-27     | 27.0           | 52.6 | 23.4 | 20.6 | 19.6 | 250/300<br>MCM | 150             |
| E150-32     | 32.0           | 57.6 |      |      |      |                |                 |

Color: Red, Green, Blue, Grey, Yellow, White, Black




## FDR Series Pre-insulated Terminal

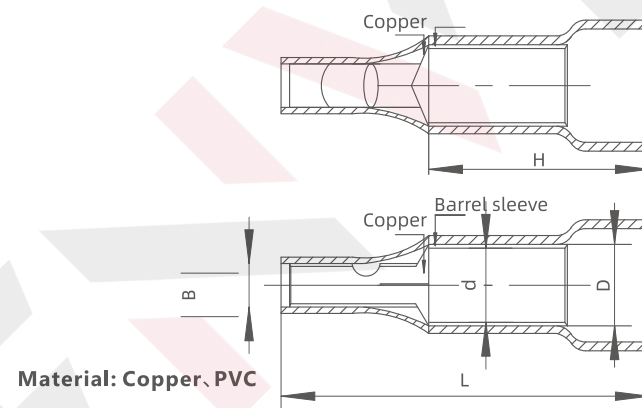

| Catalog No.        | Dimensions(mm) |     |     |      |      |
|--------------------|----------------|-----|-----|------|------|
|                    | d              | D   | B   | H    | L    |
| <b>FDR1.25-156</b> | 4.0            | 6.3 | 1.7 | 13.0 | 24.0 |
| <b>FDR1.25-176</b> | 4.5            | 6.3 | 1.7 | 13.0 | 24.0 |
| <b>FDR2-156</b>    | 4.0            | 6.3 | 2.3 | 14.0 | 24.5 |
| <b>FDR2-176</b>    | 4.5            | 6.3 | 2.3 | 14.0 | 24.5 |
| <b>FDR2-195</b>    | 5.0            | 7.0 | 2.3 | 14.0 | 24.5 |
| <b>FDR5.5-195</b>  | 5.0            | 7.0 | 3.4 | 14.0 | 29.5 |

Color: Red, Green, Blue, Grey, Yellow, White, Black


## MPD Series Pre-insulated Terminal

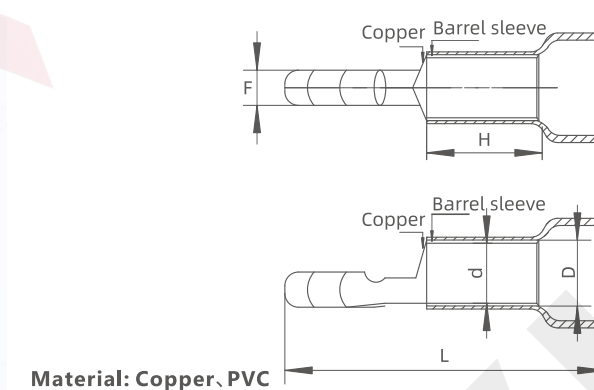

| Catalog No.        | Dimensions(mm) |      |     |      |      |
|--------------------|----------------|------|-----|------|------|
|                    | D              | B    | d   | H    | L    |
| <b>MPD1.25-156</b> | 4.0            | 11.0 | 1.7 | 10.0 | 21.0 |
| <b>MPD1.25-176</b> | 4.5            | 14.0 | 1.7 | 10.0 | 24.0 |
| <b>MPD2-156</b>    | 4.0            | 11.0 | 2.3 | 10.0 | 21.0 |
| <b>MPD2-176</b>    | 4.5            | 14.0 | 2.3 | 10.0 | 24.0 |
| <b>MPD2-195</b>    | 5.0            | 11.0 | 2.3 | 10.0 | 21.0 |
| <b>MPD5.5-195</b>  | 5.0            | 12.0 | 3.4 | 13.0 | 25.0 |

Color: Red, Green, Blue, Grey, Yellow, White, Black

## PTV Series Pre-insulated Terminal

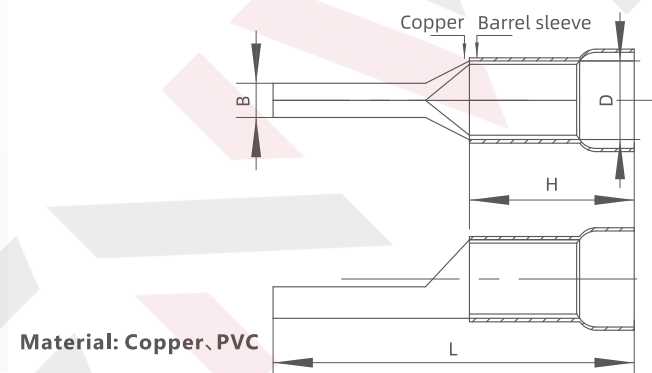


Material: Copper, PVC

| Catalog No. | Dimensions(mm) |      |      |     |
|-------------|----------------|------|------|-----|
|             | B              | L    | H    | D   |
| PTV1.25-9   | 1.9            | 19.0 |      |     |
| PTV1.25-10  | 1.9            | 20.0 |      |     |
| PTV1.25-12  | 1.9            | 22.0 | 10.0 | 4.3 |
| PTV1.25-13  | 1.9            | 23.0 |      |     |
| PTV1.25-18  | 1.9            | 28.0 |      |     |
| PTV2-9      | 1.9            | 19.0 |      |     |
| PTV2-10     | 1.9            | 20.0 |      |     |
| PTV2-12     | 1.9            | 22.0 | 10.0 | 4.9 |
| PTV2-13     | 1.9            | 23.0 |      |     |
| PTV2-18     | 1.9            | 28.0 |      |     |
| PTV3.5-10   | 2.8            | 20.0 |      |     |
| PTV3.5-13   | 2.8            | 25.5 | 13.0 | 6.2 |
| PTV5.5-13   | 2.8            | 25.5 | 13.0 | 6.7 |

Color: Red, Green, Blue, Grey, Yellow, White, Black

## DBV Series Pre-insulated Terminal

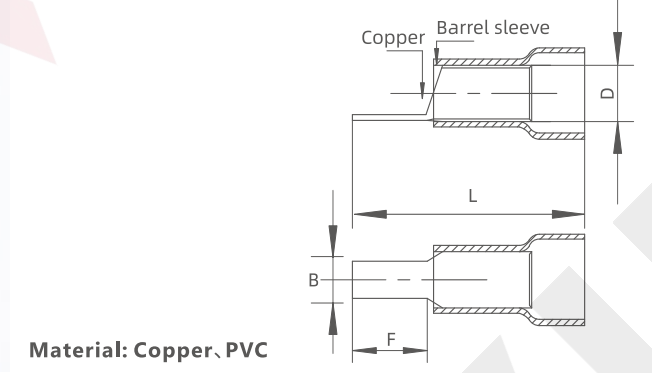


Material: Copper, PVC

| Catalog No. | Dimensions(mm) |      |      |     |
|-------------|----------------|------|------|-----|
|             | B              | L    | F    | D   |
| DBV1.25-10  | 2.3            | 20.2 | 10.0 |     |
| DBV1.25-11  | 3.0            | 21.0 | 11.0 |     |
| DBV1.25-14  | 3.0            | 24.0 | 14.0 | 4.3 |
| DBV1.25-18  | 2.2            | 28.0 | 18.0 |     |
| DBV2-9      | 2.8            | 19.0 | 9    |     |
| DBV2-10     | 2.4            | 20.0 | 10.0 |     |
| DBV2-14     | 2.4            | 24.0 | 14.0 | 4.9 |
| DBV2-18     | 2.2            | 28.0 | 18.0 |     |
| DBV5.5-10   | 2.8            | 22.5 | 10.0 |     |
| DBV5.5-14   | 4.5            | 26.5 | 14.0 | 5.6 |
| DBV5.5-18   | 4.5            | 30.5 | 18.0 |     |

Color: Red, Green, Blue, Grey, Yellow, White, Black


## BLMT Mechanical Cable Lugs

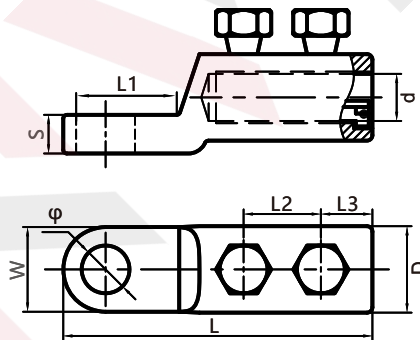

Material: 6061 Aluminum Alloy

| Catalog No.     | Dimensions(mm) |     |       |     |      |      |      |    |      |          |
|-----------------|----------------|-----|-------|-----|------|------|------|----|------|----------|
|                 | φ              | D   | d     | L   | L1   | L2   | L3   | W  | S    | Bolt Qty |
| BLMT-16/70-13   | 13             | Φ23 | Φ12.8 | 84  | 26   | 21   | 14   | 23 | 10   | 1/2      |
| BLMT-25/95-13   | 13             | Φ23 | Φ12.8 | 74  | 31.5 | 15   | /    | 23 | 10   | 1/2      |
| BLMT-35/150-13  | 13             | Φ27 | Φ16.5 | 99  | 36   | 25   | /    | 27 | 10   | 1/2      |
| BLMT-95/240-13  | 13             | Φ32 | Φ20.5 | 127 | 40   | 27   | 18   | 32 | 14.5 | 2/3      |
| BLMT-120/300-13 | 13             | Φ36 | Φ24   | 130 | 39   | 28   | 24.5 | 36 | 14.5 | 2/3      |
| BLMT-185/400-17 | 17             | Φ41 | Φ26   | 154 | 43.5 | 51.5 | 17   | 41 | 17   | 2/3      |

## AMB Mechanical Connector

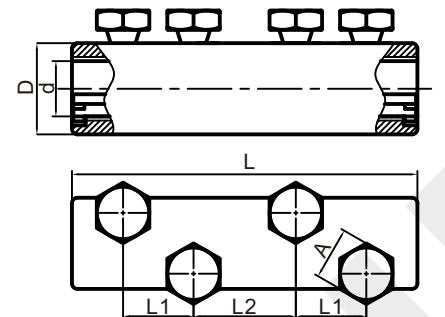

Material: 6061 Aluminum Alloy

| Catalog No. | Dimensions(mm) |       |    |     |    |    |          |
|-------------|----------------|-------|----|-----|----|----|----------|
|             | D              | d     | A  | L   | L1 | L2 | Bolt Qty |
| AMB-10/35   | Φ19            | Φ8.8  | 10 | 45  | 25 | /  | 2        |
| AMB-25/95   | Φ24            | Φ12.8 | 13 | 65  | 35 | /  | 2        |
| AMB-35/150  | Φ28            | Φ16.5 | 17 | 80  | 43 | /  | 2        |
| AMB-95/240  | Φ33            | Φ20.5 | 19 | 125 | 27 | 35 | 4        |
| AMB-120/300 | Φ37            | Φ24   | 20 | 140 | 28 | 35 | 4        |
| AMB-185/400 | Φ42            | Φ25   | 22 | 170 | 53 | 58 | 6        |