

The logo for ENVI, featuring the letters 'ENVI' in a bold, black, sans-serif font. The letter 'V' is stylized with a red diagonal stripe running from the top-left to the bottom-right.

ENVI

Add: No. 232, Wei12 Road, Development Zone, Yueqing City, 325603, Zhejiang Province, China

WHATSAPP/WECHAT: 86-18875809966

Website: www.enviele.com

TEL: 0086-577-61757057 **Fax:** 0086-577-61757057

EMAIL: sale01@envielectrical.com



CABLE CONNECTORS

COMPANY INTRODUCTION

Zhejiang Enwei Electrical Equipment Co., Ltd. was established in 2011, with its headquarters located in Yueqing City, Zhejiang Province. We are a company specialized in the production of products such as cable connectors, wiring terminals, cable accessories, and power line clips.

COMPANY MISSION



Our mission is to safeguard the electrical safety of our customers and provide them with reliable electrical connection solutions.

DEVELOPMENT MILESTONES

Since the establishment of the Weierde brand in 2004, we have continuously strived for development. We officially registered as a company in 2011. In 2015, we achieved nationwide sales network construction. Furthermore, we obtained the qualification as a supplier to the State Grid Corporation of China in 2018 and acquired the qualification as a supplier to the Southern Power Grid of China in 2019.

FUTURE PROSPECTS

We will continue to focus on improving product quality, researching metal processing technology, and actively promoting green and recyclable development. We hope that through our efforts, we can better safeguard human electrical safety and contribute to the sustainable development of society.

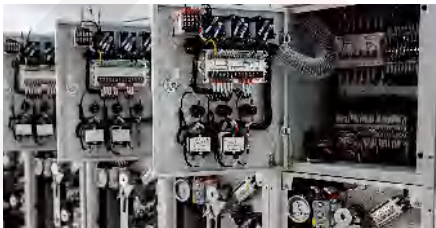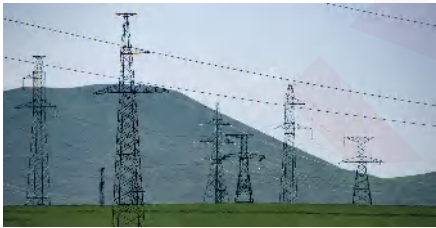


Zhejiang Enwei Electric Co., Ltd. is located in the Yueqing Economic Development Zone, Zhejiang Province, China. It is a professional manufacturer of electrical fittings with nearly 30 years of experience in metal processing. Since its establishment, the company has focused on providing high-quality cable accessories, line fittings, and various other electrical products for the power transmission and distribution industry, which are widely used in various power engineering projects.

As a leading enterprise in the industry, Enwei Electric adheres to high manufacturing standards and strict quality control. With rich experience and flexible production capabilities, we are able to quickly respond to market changes and provide customized solutions to our customers. The company is equipped with advanced production facilities and technologies to ensure that each product meets or even exceeds customer expectations.

At Enwei Electric, we understand that our customers' success is our success. We not only provide high-quality products but also emphasize close cooperation with our clients, listening to their needs and offering comprehensive technical support and after-sales services. Through continuous investment in research and development and process innovation, we are constantly improving the performance, durability, and ease of installation of our products, helping clients achieve more efficient and reliable solutions in their projects.

With excellent product quality and superior customer service, Zhejiang Enwei Electric Co., Ltd. has gained wide trust from both domestic and international customers. We will continue to uphold the principle of "Quality First, Customer Supreme," striving for progress and contributing to the development of the global power industry.

DT Series Copper Terminal

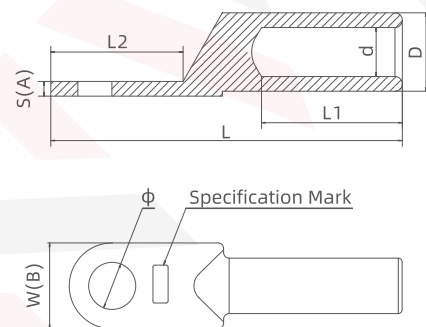

Material: Copper


Catalog No.	Dimensions(mm)							
	ϕ	D	d	L1	L2	L	W	S
DT-A-10	8.5	9	5.5	29	21	63	16	2.2
DT-A-16	8.5	10	6.5	30	21.5	65	15.7	2.5
DT-A-25	8.5	11	7.5	35	25	70	18	2.5
DT-A-35	10.5	12	8.3	38	27	78	20	3.1
DT-A-50	10.5	14	9.7	42	30	86	23	3.8
DT-A-70	12.5	16	11.1	46	32	93	26	4
DT-A-95	12.5	18	13.6	52	35	105	28.5	4
DT-A-120	14.8	20	15.5	55	36.5	112	30	4.5
DT-A-150	14.5	22	16.5	57	39	118	34	5.5
DT-A-185	16.5	24.5	18.2	59	44	123	37	6
DT-A-240	16.5	27	21	65	47	134	40	6.5
DT-A-300	21	29	23	67	60	160	45	7.8
DT-A-400	22	34	25.6	77	65	165	50	9
DT-A-500	22	38.2	28.7	77	73.5	186	55	9.4
DT-A-630	22	45	34.5	86	78	215	59	11.5

Catalog No.	Dimensions(mm)							
	ϕ	D	d	L1	L2	L	B	A
DT-B-16	8.8	9	6.2	31	23	62	15	2
DT-B-25	8.5	10	7.5	32	22	67	16	2.3
DT-B-35	10.7	10.7	8.3	32	24	71	18	2.3
DT-B-50	10.5	12.7	10	34.5	27	79	20	2.6
DT-B-70	12.5	14.7	11.8	36.5	29	84	23	2.9
DT-B-95	12.5	17	13.6	42	35	93	26	3.5
DT-B-120	14.8	18.7	15.5	46	34	96	28	3.5
DT-B-150	16.5	20.7	16.7	46	36	104	30	4.2
DT-B-185	16.5	22.7	18.5	50	40	113	32.5	4.6
DT-B-240	16.7	25.7	21.2	52	44	121	37	5.5
DT-B-300	20.1	30	23.5	64	46.5	138	42	6.1

DT Series Copper Terminal

Catalog No.	Dimensions(mm)							
	ϕ	D	d	L1	L2	L	B	A
DT-C-10-8	8.5	8	6.1	27	19	54.5	13	1.8
DT-C-10-9	8.5	9	6.1	27	20	56	13	1.9
DT-C-16	8.5	9	6.7	28	21	58.5	15	1.8
DT-C-25	8.5	10	7.3	31	21	64	16	1.9
DT-C-35	10.5	10.7	8.4	32	23	66.5	17	2.4
DT-C-50	10.5	12.7	10	35	23	73	18	2.4
DT-C-70	12.5	14.7	11.5	41	25	78	20	2.5
DT-C-95	12.5	16.7	13.3	43	26	85	23	3.1
DT-C-120	14.5	18.7	15.7	46	30	96	28	3.2
DT-C-150	16.5	20.7	17	47	35	98	30	3.3
DT-C-185	16.5	22.7	18.5	50	35.5	109	33.5	3.1
DT-C-240	18.5	25.7	21.5	52	39	115	36	4
DT-C-300	20.5	30	23.7	60	45	132	42	5.4
DT-C-400	22	32	25.8	75	58	164	50	6
DT-C-500	22	35	29	83	70	184	55	7

DTL Series Copper And Aluminum Terminal

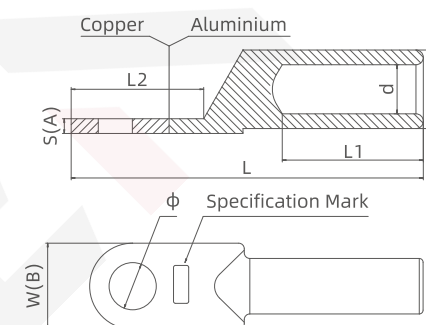

Material: Copper, aluminum


Catalog No.	Dimensions(mm)							
	ϕ	D	d	L1	L2	L	w	S
DTL-A-10	8.5	10	5.5	33	22	65	16	2.2
DTL-A-16	8.5	11	6.5	35	24	70	16	2.3
DTL-A-25	8.5	12	7.5	40	26	75	18	2.5
DTL-A-35	10.5	14	8.5	42	29	85	20	3.2
DTL-A-50	10.5	16	10	45	32	90	23	3.6
DTL-A-70	12.5	18	11.5	50	35	100	26	4
DTL-A-95	12.5	20	13.5	55	38	112	28.5	4.3
DTL-A-120	14.5	23	16	54	41	119	30	4.5
DTL-A-150	14.5	25	16.5	58	43	125	34	5.3
DTL-A-185	16.5	27	18.5	64	46	133	37	5.7
DTL-A-240	16.5	30	21	65	49	140	40	6.5
DTL-A-300	20.8	34	22.3	78.5	60	163	45	8
DTL-A-400	22	38	27	86	60	180	50	8.5
DTL-A-630	22.5	50	34.8	95	77	213	59	10.5

DTL Series Bimetal Terminal

Catalog No.	Dimensions(mm)							
	φ	D	d	L1	L2	L	B	A
DTL-B-16	8.8	10	6.5	28	22	65	14	2.3
DTL-B-25	8.8	11	7.5	31.5	24.5	69	16	2.5
DTL-B-35	10.8	12	8.5	32	26	71	18	2.8
DTL-B-50	10.8	14	10	41	28.5	81	20	2.9
DTL-B-70	12.2	16	11.5	41	31	88	23	3.2
DTL-B-95	12.2	18	13.5	42	32.5	94	26	3.6
DTL-B-120	14.8	20	15.5	51	37	105	28	3.8
DTL-B-150	14.8	22.7	17.8	50	40	112	32.5	4.2
DTL-B-185	16.8	24	18.7	58	44	123	36.8	4.4
DTL-B-240	16.8	27	20.7	59	45	135	40	4.7

Catalog No.	Dimensions(mm)							
	φ	D	d	L1	L2	L	B	A
DTL-C-10	8.5	9	5.5	30	21	64	13	1.7
DTL-C-16	8.5	10	6.3	32	22	65	14	1.9
DTL-C-25	8.5	11	7.1	31.5	21	68	16	1.9
DTL-C-35	10.5	12	8.5	36.5	25	74	17.5	2.1
DTL-C-50	10.5	14	10	40	27	82	18.5	2.5
DTL-C-70	12.5	15	11.3	40	26.5	88	22	2.6
DTL-C-95	12.8	18	13.5	47	31	94	24.5	3.1
DTL-C-120	14.8	20	15.3	53	34.5	105	27	3.2
DTL-C-150	14.8	22	17	55	37	110	29	3.7
DTL-C-185	17	24	18.7	54	41	118	31	4.2
DTL-C-240	17	27	21	57.5	41	125	34.5	4.2
DTL-C-300	17	30	23.5	67	50	142	40	5.8
DTL-C-400	22	38	27	72	61	170	50	7.5
DTL-C-500	22	42	29	78	66	175	55	8.3

DL Series Aluminum Terminal


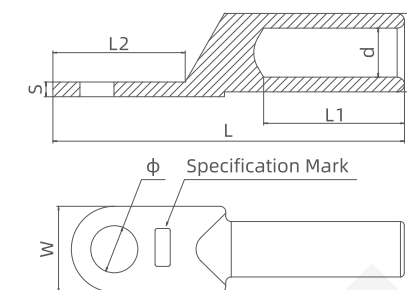


Material: Aluminum

Catalog No.	Dimensions(mm)							
	φ	D	d	L1	L2	L	w	S
DL-A-10	8.5	10	5.5	31	22	65	16	2.3
DL-A-16	8.5	11	6.5	33	24	70	16	2.4
DL-A-25	8.3	12	7.5	35	26	74	18	2.8
DL-A-35	10.5	14	8.5	44	25.5	83	22	3.4
DL-A-50	10.5	16	9.5	42	29	90	23	3.8
DL-A-70	12.5	18	11.5	50	30	99	26	4
DL-A-95	12.5	20.5	13.5	55	35	110	28	4.7
DL-A-120	14.5	23	15.5	52	36	120	30	5
DL-A-150	14.5	25	16.5	62	43.5	126	34	5.8
DL-A-185	16.5	27	18.5	63	43.5	133	37	6.8
DL-A-240	16.5	30	21	66	49	140	40	6.6
DL-A-300	21	34	23	72	58	165	45	8

Catalog No.	Dimensions(mm)							
	φ	D	d	L1	L2	L	B	A
DL-B-10	8.5	9	6	31	20.5	59	13	2.2
DL-B-16	8.5	10	6.3	30	22	64	14.5	2.2
DL-B-25	8.5	11	7.5	30	22	68	16	2.8
DL-B-35	10.5	12	8.5	37	25	71	17	2.8
DL-B-50	10.7	14	10	35	27	78	20	3
DL-B-70	12.5	16	11.3	43	30	89	23	4
DL-B-95	12.5	18	13.5	44	33	97	26	3.7
DL-B-120	14.8	20	15.3	49	37	103.5	28	4.2
DL-B-150	16.5	22	17	49.5	35	110	30	5
DL-B-185	16.5	24	18.5	56	42	118	34	5
DL-B-240	16.5	27	21	58	44	128	32	6
DL-B-300	20.5	30	23.5	65	50	142	42	6.3
DL-B-400	22	38	27.5	82	60	174	50	8


DTS series double hole copper terminal

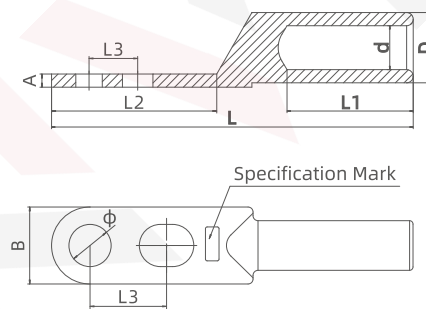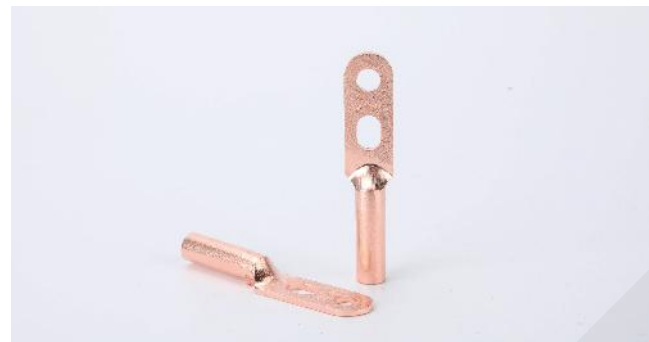

Material: Copper

Catalog No.	Dimensions(mm)								
	ϕ	D	d	A	B	L	L1	L2	L3
DTS-16	8.5	10	6.5	2.4	16	81	32	38	20
DTS-25	8.5	11	7.5	2.6	18	86	32	43	20
DTS-35	8.5	12	8.5	2.8	20	100	37	48	20
DTS-50	8.5	14	11	2.5	20	105	42	47.5	20
DTS-70	10.5	16	11.7	3.2	25	117	44	56	25
DTS-95	10.5	18	13.7	3.8	25	119	47	57	25
DTS-120	12.5	20	15.5	4	30	132	50	63	30
DTS-150	12.5	22	16.7	5	30	135	52	65	30
DTS-185	12.5	25	19	5.3	38	153	56	73	35
DTS-240	12.5	27	21.5	5.3	38	155	56	73	35
DTS-300	16.5	30	23.5	6.2	49	170	57.5	85	40
DTS-400	16.5	34	26.8	7.4	49	180	66.5	85	40


DTLS series double hole copper aluminum terminal

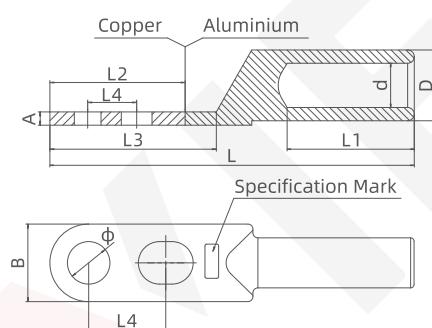

Material: Copper, aluminum

Catalog No.	Dimensions(mm)									
	ϕ	D	d	A	B	L	L1	L2	L3	L4
DTLS-25	8.5	12	7.5	2.8	18	98	36	38	44	20
DTLS-35	8.5	14	8.8	3.2	20	106	41	42	49	20
DTLS-50	8.5	16	10.5	3.2	20	110	44	42	51	20
DTLS-70	10.5	18	12	4	25	125	46	51	57	25
DTLS-95	10.5	20	13.8	4.5	25	135	51	52	60	25
DTLS-120	12.5	23	15.5	4.2	30	147	55	57	64	30
DTLS-150	12.5	24	17	5.2	30	153	58	65	74	30
DTLS-185	12.5	27	19	5.7	38	165	60	70	80	35
DTLS-240	12.5	30	21.5	6.5	38	170	61	70	80	35
DTLS-300	16.5	34	24	7.2	49	200	72	70	90	40
DTLS-400	16.5	38	26.5	7.5	49	202	75	80	92	40


SC Series Wiring Terminal

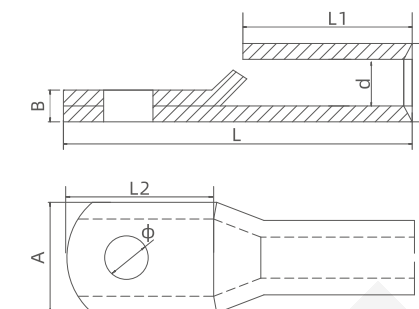

Material: Copper


Catalog No.	Dimensions(mm)							
	ϕ	A	B	D	d	L	L1	L2
SC-6-6	6.5	9.5	1	5.5	4.5	24.5	7.5	13.7
SC-6-8	8.5	11.5	0.5					
SC-10-6	6.5	10	1.5	7	5.4	26	14	13.2
SC-10-8	8.5	11.3	1					
SC-10-10	10.5	14	0.8	8	6	31.7	12	17.3
SC-16-6	6.5	12	1.8					
SC-16-8	8.5	12	1.8	9	7	33.7	12	17.5
SC-16-10	10.5	14	1.3					
SC-25-6	6.5	13.3	1.7	11	8.7	38	13.4	19.3
SC-25-8	8.5							
SC-25-10	10.5	15.3	1.9	12.5	9.9	42.3	15	20.5
SC-35-6	6.5							
SC-35-8	8.5	18.1	2.4	14.5	11.7	49.3	17.5	25
SC-35-10	10.5							
SC-50-8	8.5	21	2.6	17	13.8	54.5	21	26.8
SC-50-10	10.5							
SC-50-12	12.5	24.5	2.9	19	15.6	62	23.5	29.8
SC-70-8	8.5							
SC-70-10	10.5	27.7	3.3	21	17	71	24	33
SC-70-12	12.5							
SC-95-8	8.5	30	3.8	23	19	88	31	39
SC-95-10	10.5							
SC-95-12	12.5	33	4	26	21.6	87.5	33	43
SC-120-8	8.5							
SC-120-10	10.5	37.2	4.4	26	21.6	87.5	33	43
SC-120-12	12.5							
SC-120-14	14.5	37.2	4.4	26	21.6	87.5	33	43
SC-150-10	10.5							
SC-150-12	12.5	37.2	4.4	26	21.6	87.5	33	43
SC-150-14	14.5							
SC-185-12	12.5	37.2	4.4	26	21.6	87.5	33	43
SC-185-14	14.5							
SC-185-16	16.5	37.2	4.4	26	21.6	87.5	33	43
SC-240-12	12.5							
SC-240-14	14.5	37.2	4.4	26	21.6	87.5	33	43
SC-240-16	15.5							

SC-JGYSeries Copper Terminal

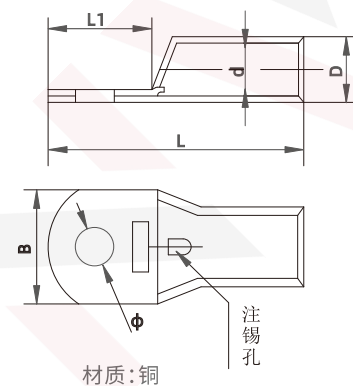

产品型号	尺寸(mm)					
	φ	D	d	L	L1	B
SC-JGY-6-6	6.5	5.5	3.8	25	14	14
SC-JGY-6-8	8.5					
SC-JGY-10-6	6.5	6.8	4.8	28	14	14
SC-JGY-10-8	8.5					
SC-JGY-16-6	6.5	7.5	5.5	31	16	16
SC-JGY-16-8	8.5					
SC-JGY-16-10	10.5	9	7	34	17	17
SC-JGY-25-6	6.5					
SC-JGY-25-8	8.5					
SC-JGY-25-10	10.5					
SC-JGY-35-6	6.5	10.5	8.2	38	18	18
SC-JGY-35-8	8.5					
SC-JGY-35-10	10.5					
SC-JGY-50-6	6.5	12.5	9.8	50	22	22
SC-JGY-50-8	8.5					
SC-JGY-50-10	10.5					
SC-JGY-70-8	8.5	14.5	11.5	51	22.5	22.5
SC-JGY-70-10	10.5					
SC-JGY-70-12	12.5					
SC-JGY-95-8	8.5	17.5	13.8	56	24	24
SC-JGY-95-10	10.5					
SC-JGY-95-12	12.5					
SC-JGY-120-8	8.5	19.5	15.5	71	33	33
SC-JGY-120-10	10.5					
SC-JGY-120-12	12.5					
SC-JGY-150-10	10.5	21	16.5	77	33.5	33.5
SC-JGY-150-12	12.5					
SC-JGY-150-14	14.5					
SC-JGY-185-12	13	23.5	18.8	84	35.5	35.5
SC-JGY-185-14	15					
SC-JGY-185-16	17					
SC-JGY-240-12	13	26.5	21	91	38.5	38.5
SC-JGY-240-14	15					
SC-JGY-240-16	17					
SC-JGY-300-16	17	30	24	103	42	42
SC-JGY-300-20	21					
SC-JGY-400-16	17	34	26.5	113	49	49
SC-JGY-400-20	21					


JG Series Aluminum Terminal

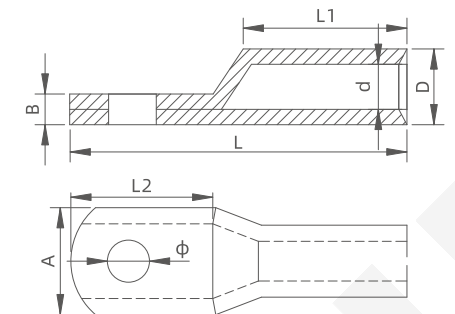

Material: Copper

Catalog No.	Dimensions(mm)							
	φ	A	B	D	d	L	L1	L2
JG-10-6	6.5	11.3	1.9	8	6	38.3	17	16
JG-10-8	8.5							
JG-16-6	6.5	12.2	2.6	9	6.2	41	17.2	18.7
JG-16-8	8.5							
JG-25-8	8.5	13.8	2.6	10	7.2	46.5	21.5	19.5
JG-25-10	10.5							
JG-35-8	8.5	15.5	2.6	11	8.2	50.5	20.3	20
JG-35-10	10.5							
JG-35-12	12.5							
JG-50-8	8.5	18.4	2.8	13	10.2	53	20.3	22.3
JG-50-10	10.5							
JG-50-12	12.5							
JG-70-8	8.5	22.7	3.7	16	12	59	20	27
JG-70-10	10.5							
JG-70-12	12.5							
JG-95-8	8.5	25.6	3.8	18	14	65	22.6	31.8
JG-95-10	10.5							
JG-95-12	12.5							
JG-120-8	8.5	28.6	3.7	20	16	72	31.4	31
JG-120-10	10.5							
JG-120-12	12.5							
JG-120-14	14.5	31.5	3.8	22	18	79	33	36.5
JG-150-12	12.5							
JG-150-14	14.5							
JG-150-16	10.5	34.4	4.9	24	19	87.5	35	40.5
JG-185-12	12.5							
JG-185-14	14.5							
JG-185-16	16.5	37.3	4.9	26	21	93	42	40.5
JG-240-12	12.5							
JG-240-14	14.5							
JG-240-16	16.5							


DTX Series Copper Terminal

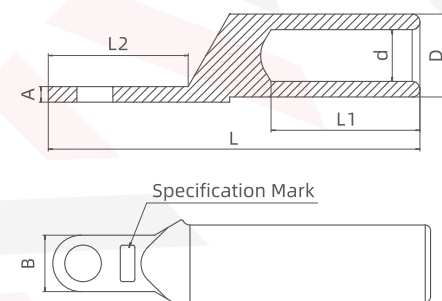

Material: Copper

Catalog No.	Dimensions(mm)							
	ϕ	D	d	L1	L2	L	B	A
DT-X-35	8.5	12	8.3	39	28	78	16	2.8
DT-X-50	8.5	13	10	40	27	80	16	3.1
DT-X-70	8.5	15	11.8	42	28	86	16	3.4
DT-X-95	10.5	17	13.8	42	29	86	18	3.8
DT-X-120	10.5	19	15.7	45	29	92	18	4.2
DT-X-150	10.5	21	16.5	54	33	104	18	4.2
DT-X-185	10.5	24	18.5	59	33	111	18	4.8
DT-X-240	10.5	26	21.5	54	35	110	18	5.7


DTLX Series Bimetal Terminal

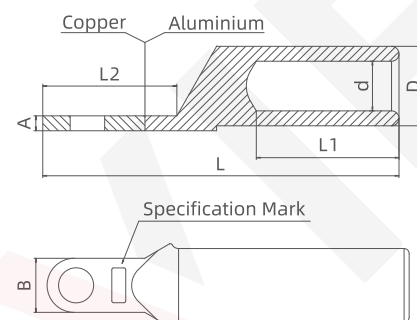

Material: Copper, aluminum

Catalog No.	Dimensions(mm)							
	ϕ	D	d	L1	L2	L	B	A
DTL-X-35	8.5	14	9	42	28	83	16	3
DTL-X-50	8.5	16	10.5	47	28	90	16	3.2
DTL-X-70	8.5	18	11.5	47	28	93	16	3.8
DTL-X-95	8.5	20	13.8	50	28	97	16	4.6
DTL-X-120	10.5	22	15	52	35	102	16	4.8
DTL-X-150	10.1	25	17	56	35	113	18	5.5
DTL-X-185	10.1	27	18.5	58	35	117	18	6
DTL-X-240	10.1	30	21.5	60	35	125	18	6.8
DTL-X-300	12.5	32	23.5	65	35	130	22	7


DTF Series Copper Terminal

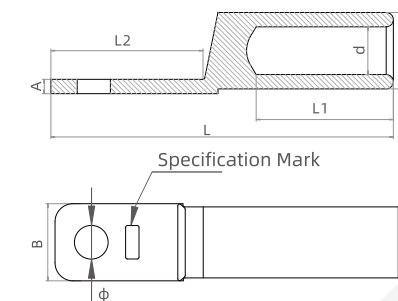

Material: Copper

Catalog No.	Dimensions(mm)							
	ϕ	D	d	L1	L2	L	B	A
DTF-10	8.5	9	5.8	28	22	58	14.7	2.5
DTF-16	8.5	10	6.8	28	22	58	14.7	2.5
DTF-25	8.5	11	7.8	33	22	65	14.7	3.1
DTF-35	8.5	12	8.8	33	22	66	14.7	3
DTF-50	10.5	14	10	38	25.5	73	15.7	4
DTF-70	12.5	16	11.8	46	29	85	19.7	4.3
DTF-95	12.5	18	13.6	46	29	85	19.7	5
DTF-120	14.5	20	15.5	54	32	99	23.7	5
DTF-150	14.5	22	16.8	55	32	101	23.7	6
DTF-185	16.5	25	18.8	56	38	109	25.7	7.1
DTF-240	16.5	27	21.5	59	38	111	25.7	7.2


DTL Series Bimetal Terminal

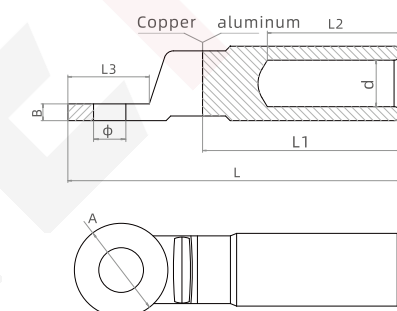

Material: Copper, aluminum

Catalog No.	Dimensions(mm)								
	L	L1	L2	L3	D	d	A	B	ϕ
DTL-16	85	57	48	19.5	16	5.8	22	3	11.2
DTL-25	85	57	48	19.5	16	6.6	22	3	11.2
DTL-35	85	57	48	19.5	16	8.2	22	3	11.2
DTL-50	100	68	57	25	20	9.2	25	4.2	13.3
DTL-70	100	68	57	25	20	11.5	25	4.2	13.3
DTL-95	100	68	57	25	20	13.3	25	4.2	13.3
DTL-120	114	72	67	32	25	13.7	32	5.2	13.3
DTL-150	114	72	67	32	25	15.7	32	5.2	13.3
DTL-185	125	80	69	33	32	17.7	33	6.2	13.3
DTL-240	125	80	69	33	32	19.8	33	6.2	13.3
DTL-300	135	82	70	37	34	22.8	37	7.2	13.3
DTL-400	160	109	90	38	40	26	37	7.2	13.3
DTL-500	160	109	90	38	40	29	37	7.5	13.3
DTL-630	185	122	100	43	47	33	37	9.5	13.3


DTLC-1 Series Bimetal Terminal

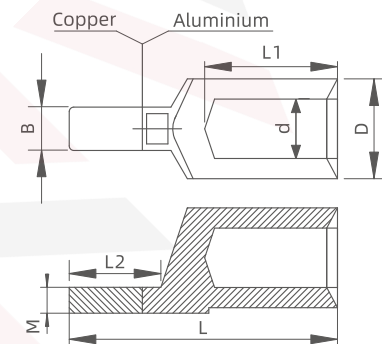

Material: Copper, aluminum

Catalog No.	Dimensions(mm)						
	L	L1	L2	D	d	B	M
DTLC-1-10	47	23	18	10	5.5	7	5
DTLC-1-16	47	23	18	10	6.3	7	5
DTLC-1-25	48.5	23	18	11	7.2	7	5
DTLC-1-35	51	22	18	12	8	7	5
DTLC-1-50	54	24	18	14	9.5	7	5
DTLC-1-70	54.5	24	18	16	11.5	7	5


C45 Series cable terminal

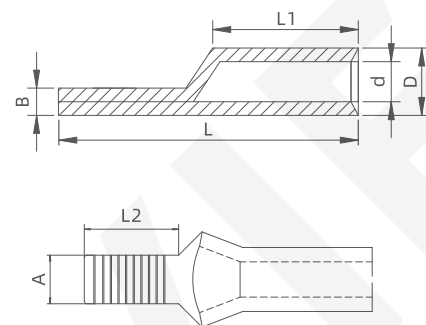

Material: Aluminum

Catalog No.	Dimensions(mm)						
	D	d	L	L1	L2	A	B
C45-4	5	4	22.7	6	10	5.2	1
C45-6	5.5	4.5	25	14	10	5.2	1
C45-10	6	5	28.7	15	12	6.3	1
C45-16	8	6.4	32.5	19.2	12	7.2	1.8
C45-25	9	7.2	36	21.5	12	6.8	2
C45-35	11	9.2	36	21	12	6.8	2.1
C45-50	12.5	10.7	41	21	12	6.8	1.8
C45-70	15	12.4	45	20	12	8.3	2.6
C45-95	16	13.2	47.5	24.5	15.8	10.5	2.8
C45-120	18	14.8	54	26.5	15.8	10.5	3.2

GT Series Copper And Aluminum Wiring Tube

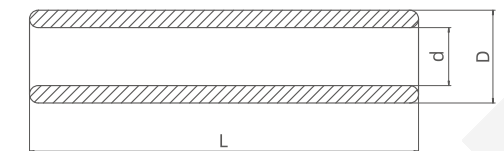


Material: Copper, Aluminum

产品型号	尺寸(mm)						
	Type B				Type A		
	L	D	d		L	D	d
GT-10	51	8	6		51	8	6
GT-16	54	9	7.2		54	9	6.2
GT-25	59	10	8		59	10	7.2
GT-35	61	11	9		61	12	8.2
GT-50	68	13	10.6		68	14	10
GT-70	81	15	12.2		81	16	12
GT-95	83	17	13.8		83	18	14
GT-120	94	19	15.6		94	20	16
GT-150	97	21	17		97	22	17
GT-185	105	23	19		105	25	119
GT-240	112	26	21.8		112	27	21
GT-300	114	30	24.4		114	31	24
GT-400	143	32	25.4		143	34	26
GT-500	-	-	-		165	38	30

产品型号	尺寸(mm)						
	Type B				Type A		
	L	D	d		L	D	d
GL-10	64	8	5		64	9	6
GL-16	64	10	7		64	10	5.6
GL-25	68	11	8		70	12	7.2
GL-35	72	12	9		72	14	8.6
GL-50	74	14	10		80	16	10
GL-70	82	16	12		90	18	11.6
GL-95	92	18	14		95	21	13.8
GL-120	94	20	17.5		101	23	15
GL-150	104	22	17.5		105	25	17
GL-185	110	24	19		110	27	18.6
GL-240	114	27	21		120	30	21
GL-300	135	30	23.4		140	34	22.8
GL-400	138	34	26		142	38	26.4


GTL Series Copper And Aluminum Wiring Tube

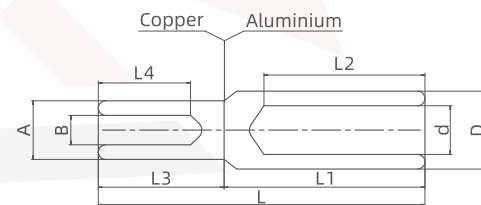

Material: Copper, aluminum

Catalog No.	Dimensions(mm)								
	L	D	d	L1	L2	A	B	L3	L4
GTL-10	65	10	6.5	39	32	8	4.2	26	22
GTL-16	70	10	6.5	40	33	9	5.5	30	25
GTL-25	75	11	7.5	44	36	10	6.5	31	27
GTL-35	82	13	8.7	49	40	12	7.5	33	29
GTL-50	93	15	10	55	47	13	8.7	37	32
GTL-70	100	18	12	60	50	14	9.7	40	35
GTL-95	105	20	13.7	63	52	16	11.7	42	37
GTL-120	110	22	15.3	65	55	19	13.7	45	40
GTL-150	115	24	16.8	68	58	21	15.5	47	42
GTL-185	125	27	18.8	73	62	23	16.8	52	46
GTL-240	135	30	21.5	79	65	25	18.8	56	50
GTL-300	145	34	24	85	70	28	21.5	60	52

GTU Series Wiring Tube

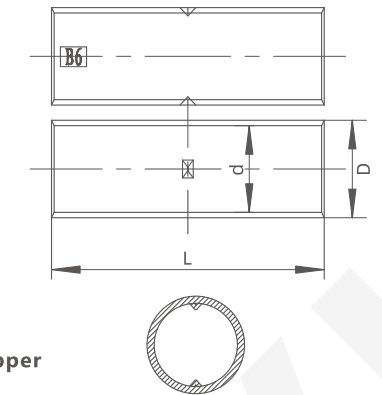


Material: Copper

Catalog No.	Dimensions(mm)		
	D	d	L
GTU-2-1.5	3.1	1.9	20
GTU-2-2.5	4	2.9	20
GTU-2-4	4.5	3.3	20
GTU-2-6	5.1	3.8	25
GTU-2-10	6	4.5	30
GTU-2-16	7.3	5.8	35
GTU-2-25	9	7.3	40
GTU-2-35	10.7	8.7	45
GTU-2-50	12.5	10	50
GTU-2-70	14.5	11.7	55
GTU-2-95	17	13.8	60
GTU-2-120	19	15	65
GTU-2-150	21	17	70
GTU-2-185	23.5	19.5	75
GTU-2-240	26	21	80
GTU-2-300	30	24	85
GTU-2-400	34	27	90
GTU-2-500	38	30	100
GTU-2-630	44	35	110

BN Series Wiring Tube



Material: Copper

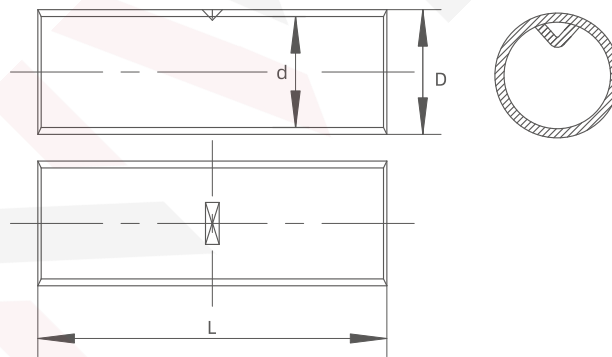


Catalog No.	Dimensions(mm)		
	D	d	L
BN1.25	3.3	2.1	15
BN2	4	2.7	15
BN3.5	4.9	3.5	15
BN5.5	5.6	4	15
BN8	7.1	5.1	21
BN14	9	6.8	26
BN22	11.5	8.5	29
BN38	13	10	32
BN60	14.5	11.6	35
BN70	15.9	12.2	38
BN80	18	14	38
BN100	20.5	16	38

M Series Wiring Tube




Material: Copper

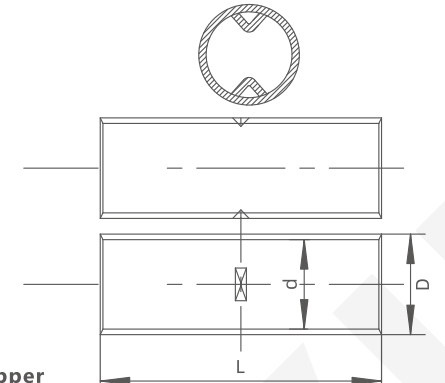

Catalog No.	Dimensions(mm)		
	D	d	L
M1.5	4	2.5	22
M2.5	4.3	2.8	22
M4	4.8	3.1	25
M6	5.5	3.9	25
M10	6.9	4.6	25
M16	7.8	5.6	29
M25	9.5	7.1	29
M35	11	8.4	35
M40	11.2	9	35
M50	12.5	9.6	35
M70	15	11.6	45
M95	17	13.6	47
M120	20	15.6	52
M150	21	16.6	59
M185	23.5	18.5	65
M240	26.5	21.3	75
M300	28.5	23.3	90
M400	32.8	27	106


OT Series Open Nose

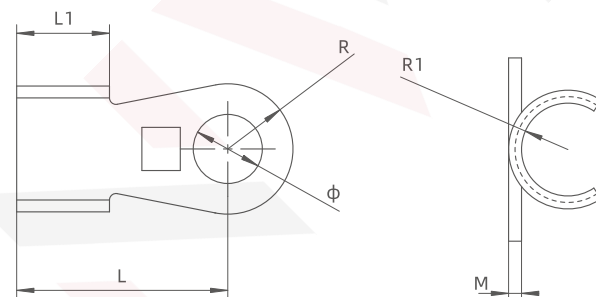

Material: Copper

Catalog No.	Dimensions(mm)					
	ϕ	L	R	R1	M	Type B
OT-5A	5.2	12.1	5	2	0.5	-
OT-10A	5.2	14.5	6	3	0.6	-
OT-20A	6.2	17.3	7.3	3.7	0.9	0.7
OT-30A	6.2	17.3	7.5	3.8	1	0.8
OT-40A	6.2	19.8	8.8	4.2	1.1	0.85
OT-50A	6.2	21.5	9.3	4.2	1.2	0.9
OT-60A	8.2	23	10.5	4.4	1.3	1
OT-80A	8.2	25.5	11	5.2	1.4	1
OT-100A	8.2	29	12	5.5	1.5	1
OT-150A	10.2	31	12.5	6	1.7	1.3
OT-200A	10.2	32.3	13.5	7.9	1.8	1.4
OT-250A	10.2	34.7	14.5	9.2	1.9	1.5
OT-300A	12.2	38	16.5	10	2	1.6
OT-400A	14.2	41.8	18	10	2.3	1.7
OT-500A	14.2	46	20.5	10.5	2.5	1.8
OT-600A	16.2	48.9	21.5	10.7	3	2
OT-800A	18.2	58	27	16.5	3	-
OT-1000A	18.2	65	33	19	3.4	-
OT-1500A	20.2	77.5	40	19.5	3.8	-

RV Series Pre-insulated Terminal

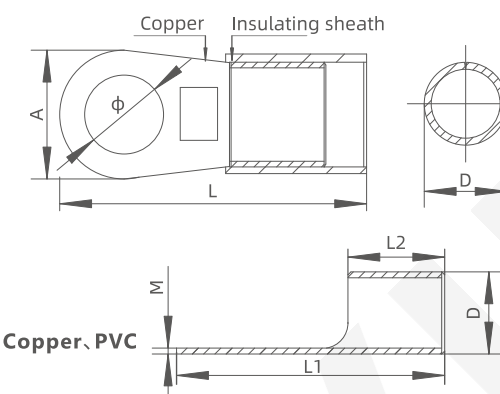

Material: Copper, PVC


Catalog No.	Dimensions(mm)						
	ϕ	A	M	D	L1	L2	L
RV-1.25-3	3.3	5.6	0.55	3.1	11.6	4	18
RV-1.25-4	4.3	6.6	0.55	3.1	13.6	4	20
RV-1.25-5	5.3	8	0.55	3.1	14.5	4	21
RV-12.5-6	6.5	11.6	0.55	3.1	19.5	4	25
RV-1.25-8	8.5	11.6	0.55	3.1	19.5	4	26
RV-2-3	3.3	6	0.55	3.7	12.3	5	18
RV-2.4	4.3	6.6	0.55	3.7	13.8	5	20
RV-2-5	5.3	8.5	0.55	3.7	15.5	5	22
RV-2-6	6.5	11.6	0.55	3.7	19.2	5	26
RV-3.5-4	4.3	7.9	0.65	4.7	16.2	6.2	24
RV-3.5-5	5.3	7.9	0.65	4.7	16.2	6.2	25
RV-3.5-6	6.5	11.6	0.65	4.7	19.4	6.2	28
RV-3.5-8	8.5	14.3	0.65	4.7	25.1	6.2	34
RV-5.5-4	4.3	7.2	0.75	5.2	15	6.6	23
RV-5.5-5	5.3	9.5	0.75	5.2	15	6.6	26
RV-5.5-6	6.5	11.6	0.75	5.2	19.8	6.6	27
RV-5.5-8	8.5	14.8	0.75	5.2	26.1	6.6	34

Color: Red, Green, Blue, Grey, Yellow, White, Black

FDD Series Pre-insulated Terminal



Material: Copper, PVC

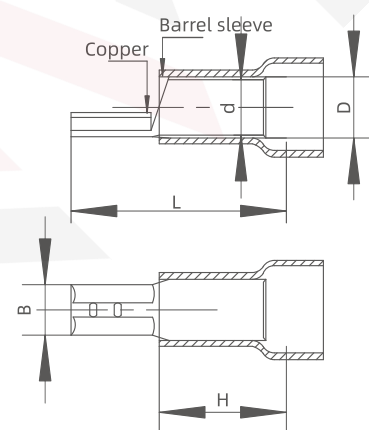


Catalog No.	Dimensions(mm)				
	B	d	D	L	H
FDD1.25-110(5)	3.8	1.7	3.8	19.0	10.0
FDD1.25-110(8)	3.8	1.7	3.8	19.0	10.0
FDD1.25-187(5)	5.6	1.7	3.8	19.0	10.0
FDD1.25-187(8)	5.6	1.7	3.8	19.0	10.0
FDD1.25-205	6.5	1.7	3.8	20.0	10.0
FDD1.25-250	7.4	1.7	3.8	21.0	10.0
FDD2-110(5)	3.8	2.3	4.3	19.0	10.0
FDD2-110(8)	3.8	2.3	4.3	19.0	10.0
FDD2-187(5)	5.6	2.3	4.3	19.0	10.0
FDD2-187(8)	5.6	2.3	4.3	19.0	10.0
FDD2-205	6.5	2.3	4.3	20.0	10.0
FDD2-250	7.4	2.3	4.3	21.0	10.0
FDD2-312	9.0	2.3	4.3	23.0	10.0
FDD5.5-250	7.4	3.4	5.7	25.0	13.0
FDD5.5-375	10.9	3.4	5.7	29.6	13.0

Color: Red, Green, Blue, Grey, Yellow, White, Black

MDD Series Pre-insulated Terminal




Material: Copper, PVC

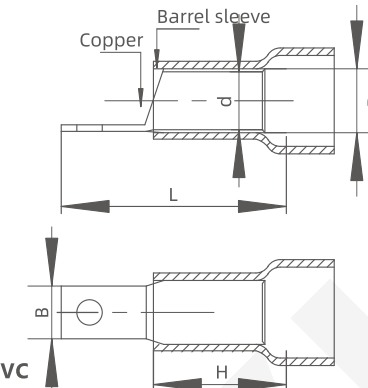

Catalog No.	Dimensions(mm)				
	B	d	D	L	H
MDD1.25-110(5)	2.8	1.7	4.3	17.7	10.0
MDD1.25-110(8)	2.8	1.7	4.3	17.7	10.0
MDD1.25-187(5)	4.75	1.7	4.3	20.0	10.0
MDD1.25-187(8)	4.75	1.7	4.3	20.0	10.0
MDD1.25-250	6.35	1.7	4.3	21.0	10.0
MDD1.25-110(5)	2.8	2.3	4.3	7.7	10.0
MDD1.25-110(8)	2.8	2.3	4.3	7.7	10.0
MDD2-187(5)	4.75	2.3	4.3	20.0	10.0
MDD2-187(8)	4.75	2.3	4.3	20.0	10.0
MDD2-250	6.35	2.3	4.3	21.0	10.0
MDD5.5-250	6.35	3.4	5.7	25.0	13.0

Color: Red, Green, Blue, Grey, Yellow, White, Black

SV Series Pre-insulated Terminal

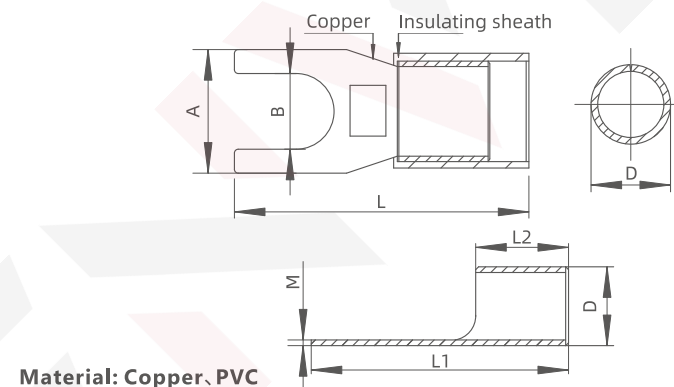


Material: Copper, PVC

Catalog No.	Dimensions(mm)						
	B	A	M	D	L1	L2	L
SV-1.25-3	3.2	5.5	0.55	3.1	13.9	4	20
SV-1.25-4	4.3	6.4	0.55	3.1	14.9	4	21
SV-1.25-5	5.3	8	0.55	3.1	15	4	21
SV-12.5-6	6.3	9.5	0.55	3.1	15.1	4	21
SV-2-3	3.2	5.6	0.55	3.7	15	5	21
SV-2-4	4.3	6.4	0.55	3.7	15	5	21
SV-2-5	5.3	8	0.55	3.7	16	5	22
SV-2-6	6.3	9.5	0.55	3.7	15	5	21
SV-3.5-4	4.3	7.6	0.65	4.7	17.7	6.2	25
SV-3.5-5	5.3	7.8	0.65	4.7	17.7	6.2	25
SV-3.5-6	6.3	10	0.65	4.7	18.6	6.2	26
SV-5.5-4	4.3	7.7	0.75	5.2	17.3	6.6	25
SV-5.5-5	5.3	8.7	0.75	5.2	17.3	6.6	25
SV-5.5-6	6.3	8.7	0.75	5.2	18.3	6.6	26

Color: Red, Green, Blue, Grey, Yellow, White, Black

E Series Pre-insulated Terminal

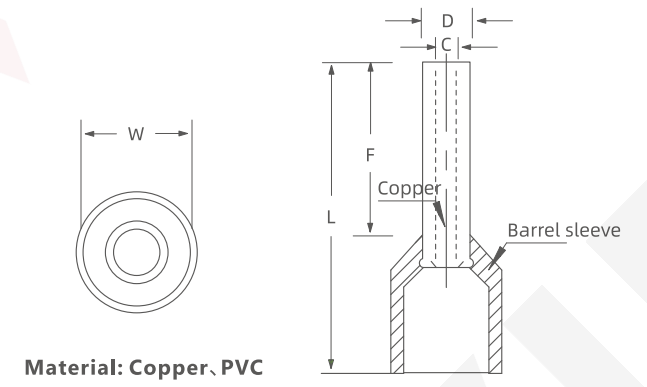


Material: Copper, PVC

Catalog No.	Dimensions(mm)						
	F	L	W	D	C	A.W.G	mm ²
E0505	5.0	11.0	2.6	1.3	1.0	22	0.5
E0506	6.0	12.0					
E0508	8.0	14.0					
E0510	10.0	16.0					
E0512	12.0	18.0	2.8	1.5	1.2	20	0.75
E7506	6.0	12.3					
E7508	8.0	14.3					
E7510	10.0	16.3					
E7518	12.0	18.3	3.0	1.7	1.4	18	1.0
E1006	18.0	24.3					
E1008	6.0	12.3					
E1010	8.0	14.3					
E1012	10.0	16.3	3.5	2.0	1.7	16	1.5
E1018	12.0	18.3					
E1508	18.0	24.3					
E1510	8.0	14.3					
E1512	10.0	16.3	4.0	2.6	2.3	14	2.5
E1515	12.0	18.3					
E1518	15.0	21.3					
E2508	18.0	24.3					
E2510	8.0	15.4	4.5	3.2	2.8	12	4.0
E2512	10.0	17.4					
E2518	12.0	19.4					
E2518	18.0	25.4					
E2525	25.0	32.4	6.0	3.9	3.5	10	6.0
E4009	9.0	16.4					
E4010	10.0	17.4					
E4012	12.0	19.4					
E4018	18.0	25.4	7.5	4.9	4.5	8	10
E6012	12.0	20.5					
E6018	18.0	26.5					
E10-12	12.0	20.8					
E10-18	18.0	26.8	8.7	6.2	5.8	6	16
E16-12	12.0	22.0					
E16-18	18.0	28.0					
E25-12	12.0	24.0					
E25-16	16.0	28.0	11.0	7.9	7.5	4	25
E25-18	18.0	30.0					
E25-22	22.0	34.0					
E35-16	16.0	30.0					
E35-18	18.0	32.0	12.5	8.7	8.3	2	35
E35-22	22.0	36.0					
E35-25	25.0	39.0					
E50-12	12.0	28.0					
E50-20	20.0	36.0	15.0	10.9	10.3	1/0	50
E70-20	20.0	37.0					
E70-25	25.0	42.0					
E70-27	27.0	44.0					
E95-25	25.0	44.0	18.5	15.6	14.8	3/0	95
E120-27	27.0	47.6					
E120-32	32.0	52.6					
E150-25	25.0	50.6					
E150-27	27.0	52.6	23.4	20.6	19.6	250/300 MCM	150
E150-32	32.0	57.6					

Color: Red, Green, Blue, Grey, Yellow, White, Black

FDR Series Pre-insulated Terminal

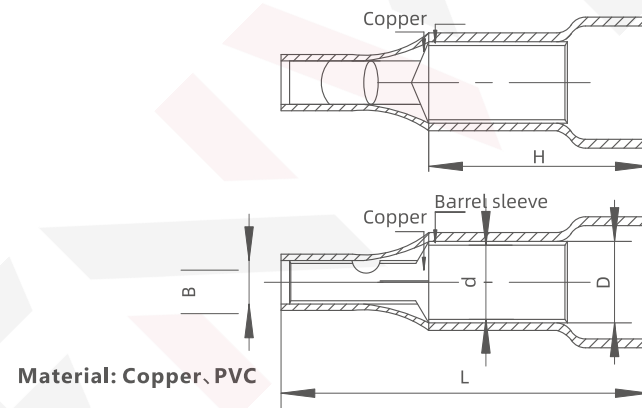


Material: Copper, PVC

Catalog No.	Dimensions(mm)				
	d	D	B	H	L
FDR1.25-156	4.0	6.3	1.7	13.0	24.0
FDR1.25-176	4.5	6.3	1.7	13.0	24.0
FDR2-156	4.0	6.3	2.3	14.0	24.5
FDR2-176	4.5	6.3	2.3	14.0	24.5
FDR2-195	5.0	7.0	2.3	14.0	24.5
FDR5.5-195	5.0	7.0	3.4	14.0	29.5

Color: Red, Green, Blue, Grey, Yellow, White, Black

MPD Series Pre-insulated Terminal

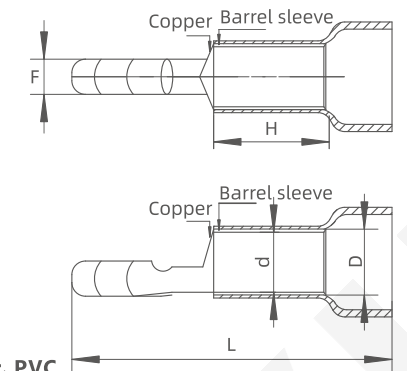


Material: Copper, PVC

Catalog No.	Dimensions(mm)				
	D	B	d	H	L
MPD1.25-156	4.0	11.0	1.7	10.0	21.0
MPD1.25-176	4.5	14.0	1.7	10.0	24.0
MPD2-156	4.0	11.0	2.3	10.0	21.0
MPD2-176	4.5	14.0	2.3	10.0	24.0
MPD2-195	5.0	11.0	2.3	10.0	21.0
MPD5.5-195	5.0	12.0	3.4	13.0	25.0

Color: Red, Green, Blue, Grey, Yellow, White, Black

PTV Series Pre-insulated Terminal

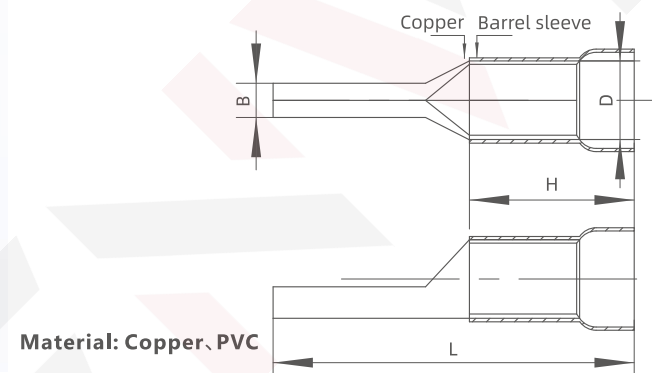


Material: Copper, PVC

Catalog No.	Dimensions(mm)			
	B	L	H	D
PTV1.25-9	1.9	19.0		
PTV1.25-10	1.9	20.0		
PTV1.25-12	1.9	22.0	10.0	4.3
PTV1.25-13	1.9	23.0		
PTV1.25-18	1.9	28.0		
PTV2-9	1.9	19.0		
PTV2-10	1.9	20.0		
PTV2-12	1.9	22.0	10.0	4.9
PTV2-13	1.9	23.0		
PTV2-18	1.9	28.0		
PTV3.5-10	2.8	20.0		
PTV3.5-13	2.8	25.5	13.0	6.2
PTV5.5-13	2.8	25.5	13.0	6.7

Color: Red, Green, Blue, Grey, Yellow, White, Black

DBV Series Pre-insulated Terminal

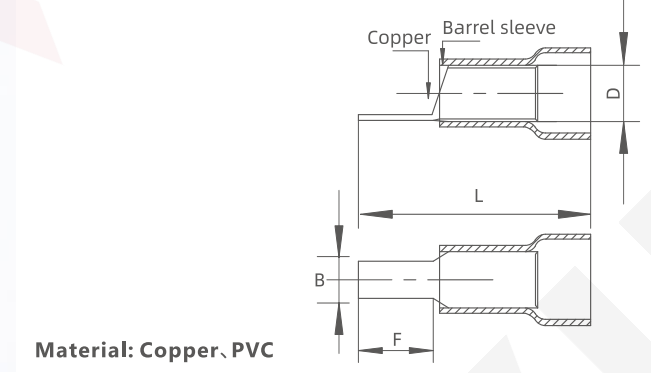

Material: Copper, PVC

Catalog No.	Dimensions(mm)			
	B	L	F	D
DBV1.25-10	2.3	20.2	10.0	
DBV1.25-11	3.0	21.0	11.0	
DBV1.25-14	3.0	24.0	14.0	4.3
DBV1.25-18	2.2	28.0	18.0	
DBV2-9	2.8	19.0	9	
DBV2-10	2.4	20.0	10.0	
DBV2-14	2.4	24.0	14.0	4.9
DBV2-18	2.2	28.0	18.0	
DBV5.5-10	2.8	22.5	10.0	
DBV5.5-14	4.5	26.5	14.0	5.6
DBV5.5-18	4.5	30.5	18.0	

Color: Red, Green, Blue, Grey, Yellow, White, Black